


TEKRAM TECHNOLOGY COMPANY, LTD.
DC-600C

Q2/94

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Four IDE (AT) Interface drives
Floppy drives supported: None

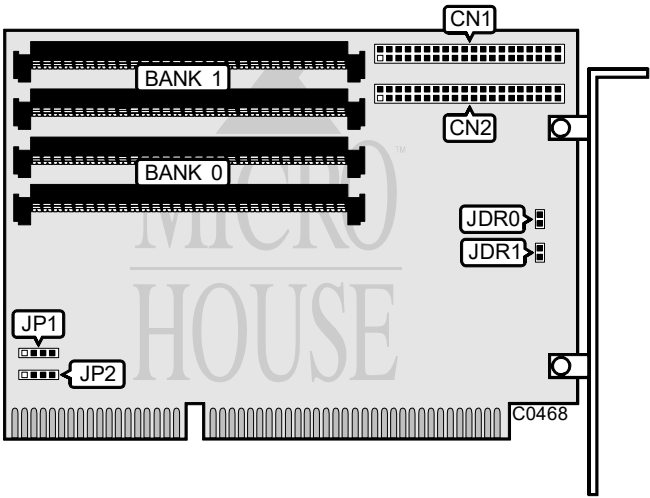

CONNECTIONS	
Function	Location
40-pin IDE (AT) Interface connector - IDE-0	CN1
40-pin IDE (AT) Interface connector - IDE-1	CN2
4-pin connector - drive active LED	JP1
4-pin connector - cache error speaker	JP2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
IDE-0 damping resistor enabled	JDR0	open
IDE-0 damping resistor disabled	JDR0	closed
IDE-1 damping resistor enabled	JDR1	open
IDE-1 damping resistor disabled	JDR1	closed

Continued on next page . . .

TEKRAM TECHNOLOGY COMPANY, LTD. DC-600C

... continued from previous page

DRIVE ACTIVE LED ERROR CODES (IMMEDIATELY AFTER POWER-UP)	
Status	Function
One short flash	No cache DRAM installed
Two short flashes	CPU error
Three short flashes	SRAM error
Four short flashes	Timer error

MISCELLANEOUS TECHNICAL NOTES
Some versions of this board have two 512KB x 8 DRAM chips mounted in place of Bank 0. In such a case the board will work without additional memory. In all other cases a pair of 256KB, 1MB, or 4MB SIMM modules must be installed in Bank 0 for the board to function.