


TRENDWARE INTERNATIONAL, INC.  
TE-32V

NIC Type: Ethernet  
 Transfer Rate: 10Mbps  
 Data Bus: 32-bit VESA-local bus  
 Topology: Linear bus  
 Star  
 Wiring Type: AUI transceiver via DB-15 port  
 RG-58A/U 50ohm coaxial  
 Shielded/Unshielded twisted pair  
 Available  
 Boot ROM: Available

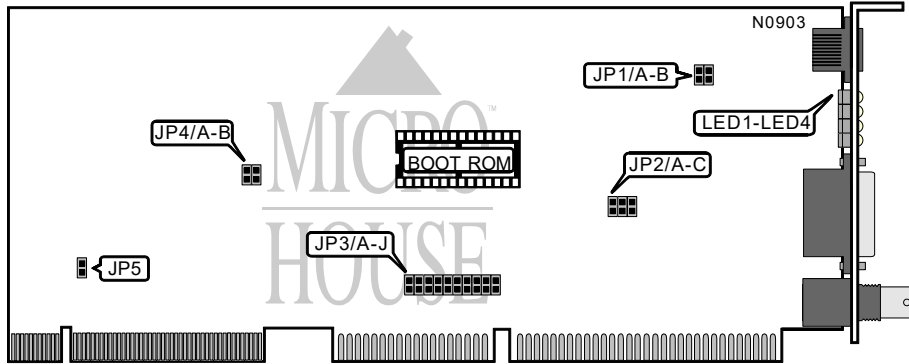

WIRING TYPE		
Setting	JP1/jumper A	JP1/jumper B
Unshielded twisted pair	Closed	Open
AUI transceiver via DB-15 port	Open	Closed
RG-58A/U 50ohm coaxial	Closed	Closed

BOOT ROM	
Setting	JP2/jumper A
Disable	Open
Enable	Closed

BOOT ROM ADDRESS		
Address	JP2/jumper B	JP2/jumper C
C0000h	Closed	Open
C0000h	Open	Open
C8000h	Open	Closed
C8000h	Closed	Closed

Continued on next page . . .

TRENDWARE INTERNATIONAL, INC.  
TE-32V

... continued from previous page

INTERRUPT SELECT - JP3											
IRQ	A	B	C	D	E	F	G	H	I	J	
IRQ5	Open	Open	Closed	Open	Open	Open	Open	Open	Open	Open	
IRQ3	Closed	Open	Open	Open	Open	Open	Open	Open	Open	Open	
IRQ4	Open	Closed	Open	Open	Open	Open	Open	Open	Open	Open	
IRQ6	Open	Open	Open	Closed	Open	Open	Open	Open	Open	Open	
IRQ7	Open	Open	Open	Open	Closed	Open	Open	Open	Open	Open	
IRQ9	Open	Open	Open	Open	Open	Closed	Open	Open	Open	Open	
IRQ11	Open	Open	Open	Open	Open	Open	Closed	Open	Open	Open	
IRQ12	Open	Open	Open	Open	Open	Open	Open	Closed	Open	Open	
IRQ14	Open	Open	Open	Open	Open	Open	Open	Open	Closed	Open	
IRQ15	Open	Open	Open	Open	Open	Open	Open	Open	Open	Closed	

I/O ADDRESS		
Address	JP4/jumper A	JP4/jumper B
300h	closed	closed
320h	closed	Open
340h	Open	closed
360h	Open	Open

VL-BUS SPEED	
Setting	JP5
Speed ≤ 33 Hz	Open
Speed > 33 Hz	Closed

DIAGNOSTIC LEDES		
LED	Status	Condition
LED1	On	Power on
LED1	Blinking	Data is being transmitted
LED2	On	Network connected successfully (UTP connection only)
LED2	Blinking	Data is being received
LED3	On	Network is not connected (RG-58A/U 50ohm coaxial connection only)
LED3	Blinking	Collision detected
LED4	Blinking	Transmission interrupted due to packet longer than allowable length (jabber)