


ADAPTEC, INC.
ACB-2071

Data bus:	8-bit, ISA
Size:	Half-length, full-height card
Hard drives supported:	One RLL ST506
Floppy drives supported:	None

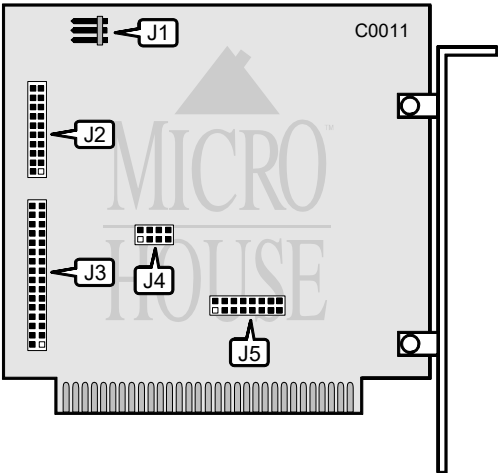

CONNECTIONS	
Function	Location
5-pin power connector	J1
20-pin data cable connector	J2
32-pin control cable connector	J3

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i I/O port address is 320h	J5/jumper 7	open
I/O port address is 324h	J5/jumper 7	closed
i BIOS enabled	J5/jumper 8	closed
BIOS disabled	J5/jumper 8	open

Continued on next page . . .

ADAPTEC, INC.

ACB-2071

... continued from previous page

BIOS DRIVE TYPE TABLE FOR DRIVE 0								
Table #	Capacity	Step Rate	Hds.	Cyl.	JP5/1	JP5/2	JP5/3	JP5/4
0	31MB	70msec	4	615	closed	closed	closed	closed
1	31MB	13msec	2	1023	closed	closed	closed	open
2	90.3MB	13msec	7	987	closed	closed	open	closed
3	38MB	13msec	3	987	closed	closed	open	open
4	65MB	13msec	5	987	closed	open	closed	closed
5	62MB	13msec	5	980	closed	open	closed	open
6	105MB	13msec	10	830	closed	open	open	closed
7	31MB	13msec	4	615	closed	open	open	open
8	15.6MB	70msec	4	306	open	closed	closed	closed
9	15.5MB	13msec	2	612	open	closed	closed	open
10	68MB	13msec	8	640	open	closed	open	closed
11	15.6MB	13msec	4	306	open	closed	open	open
12	47MB	13msec	6	640	open	open	closed	closed
13	31MB	13msec	4	640	open	open	closed	open
14	31MB	70msec	4	612	open	open	open	closed
15	31MB	13msec	4	612	open	open	open	open

BIOS ADDRESS		
Address	J5/jumper 5	J5/jumper 6
D800h	open	open
DA00h	open	closed

MISCELLANEOUS TECHNICAL NOTES
J4 is Not used.