


ADAPTEC, INC.
ACB-2072

Q2/92

Data bus: 8-bit, ISA
Size: Half-length, full-height card
Hard drives supported: Two RLL ST506 drives
Floppy drives supported: None

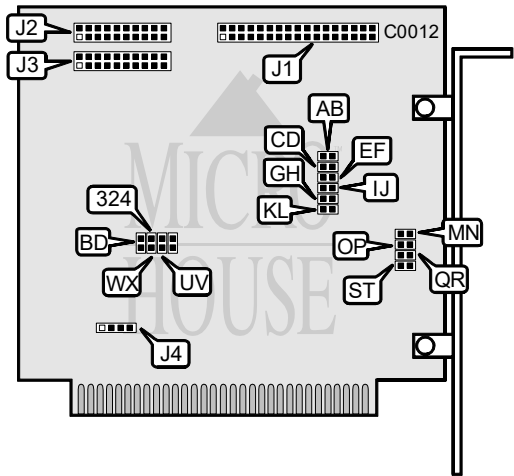

CONNECTIONS	
Function	Location
34-pin control cable connector-hard drive	J1
20-pin data cable connector-drive 0	J2
20-pin data cable connector-drive 1	J3
4-pin connector-DC power	J4

Continued on next page . . .

ADAPTEC, INC.

ACB-2072

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í BIOS enabled	BD	open
BIOS disabled	BD	closed
í I/O port address is 320h	324	open
I/O port address is 324h	324	closed
í Drive 0 is defined with Jumpers MN & OP	AB	open
Drive 0 is a Syquest drive	AB	closed
í Drive 1 is defined with Jumpers QR & ST	CD	open
Drive 1 is a Syquest drive	CD	closed
í Factory configured - do not alter	EF	open
í Factory configured - do not alter	GH	open
í Factory configured - do not alter	IJ	open
í Normal Operation	KL	open
Self-diagnostics enabled	KL	closed

BIOS ADDRESS		
Select	Jumper WX	Jumper UV
í C800h	open	open
CA00h	open	closed
F800h	closed	open
CC00h	closed	closed

BIOS DRIVE TYPE TABLE					
Table #	Hds	Cyls	RLL Cap.	Jumper MN Drive 0 Jumper QR- Drive 1	Jumper OP- Drive 0 Jumper ST- Drive 1
0	4	612	32.74MB	closed	closed
1	2	612	16.29MB	closed	open
2	5	981	65.29MB	open	closed
3	4	615	32.58MB	open	open