


ADAPTEC, INC.
ACB-2322A (VERSION 2)

Data bus: 16-bit, ISA
Size: Full-length full-height card
Hard drives supported: Two RLL ESDI
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

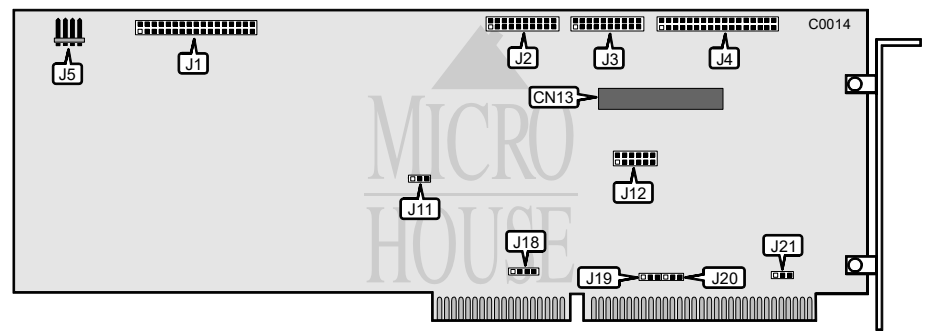

CONNECTIONS	
Function	Location
34-pin data cable connector-floppy drive	J1
20-pin data cable connector-drive 0	J2
20-pin data cable connector-drive 1	J3
34-pin control cable connector-hard drive	J4
4-pin connector-drive active LED	J5
Serial monitor output	J13

Continued on next page . . .

ADAPTEC, INC.

ACB-2322A (VERSION 2)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í BIOS address C800-CBFFh	J11	pins 1 & 2 closed
BIOS address- CC00-CFFFh	J11	pins 2 & 3 closed
í Hard drive address 1F0-1FFh	J12/jumper 1	open
Hard drive address 170-177h	J12/jumper 1	closed
í Floppy address 3F0-3F7h	J12/jumper 2	open
Floppy address 370-377h	J12/jumper 2	closed
í Zero wait state disabled	J12/jumper 3	open
Zero wait state enabled	J12/jumper 3	closed
í Not used	J12 jumper 4 & 5	open
í Serial monitor disabled	J12/jumper 6	open
Serial monitor enabled (2400b)	J12/jumper 6	closed
í Hard drive Interrupt is IRQ14	J18	pins 1 & 2 closed
Hard drive Interrupt is IRQ15	J18	pins 2 & 3 closed
í Not used	J18	pins 3 & 4 open
í Floppy drive DMA Acknowledge is DACK2	J19	pins 1 & 2 closed
Floppy drive DMA Acknowledge is DACK3	J19	pins 2 & 3 closed
í Floppy drive Interrupt is IRQ6	J20	pins 1 & 2 closed
Floppy drive Interrupt is IRQ10	J20	pins 2 & 3 closed
í Floppy drive DMA Request is DREQ2	J21	pins 2 & 3 closed
Floppy drive DMA Request is DREQ3	J21	pins 1 & 2 closed