


NETFINITY SERVERAID 3L ULTRA2

Card Type	Hard drive controller
Chip Set	Unidentified
Maximum Onboard Memory	4MB DRAM
I/O Options	SCSI connector, LED connector, DASD status connector, game port, serial port
Hard Drives supported	Up to 15 Wide SCSI-2 or Ultra-wide SCSI devices
Floppy drives supported	None
Data Bus	32-bit PCI
Card Size	Full-length/full height card

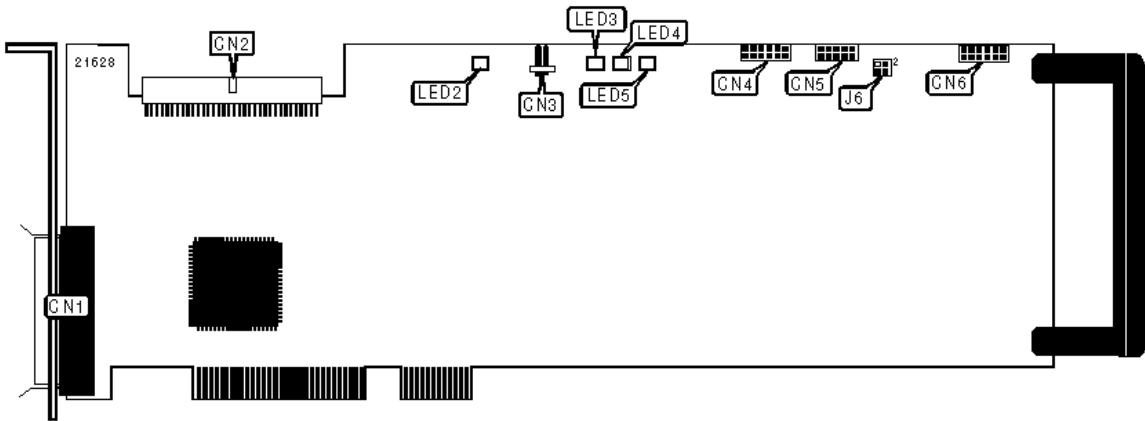

CONNECTIONS

Function	Label	Function	Label
68-pin SCSI connector Ch. 1 - external	CN1	16-pin game connector	CN4
68-pin SCSI connector Ch. 1 - internal	CN2	10-pin serial connector	CN5
2-pin connector - drive active LED	CN3	DASD status connector	CN6

DOWNLOAD VIA BOOTBLOCK

Function	J6
» Download via bootblock disabled	Open
Download via bootblock enabled	Pins 1 & 2, 3 & 4 closed
Download via bootblock enabled (secondary option)	Pins 1 & 3, 2 & 4 closed

Note: Jumpers should only be installed if download by code block fails

DIAGNOSTIC LED(S)

LED	Color	Status	Condition
LED2	Unidentified	On	Data is being received on SCSI port
LED2	Unidentified	Off	Data is not being received on SCSI port

LED3	Unidentified	On	Error detected
LED3	Unidentified	Off	Error not detected
LED4	Unidentified	On	Error detected
LED4	Unidentified	Off	Error not detected
LED5	Unidentified	On	Error detected
LED5	Unidentified	Off	Error not detected