


ADAPTEC, INC.
ACB-2320D, ACB-2322D

Q2/92

Data bus:	16-bit, ISA
Size:	Half-length, full-height card
Hard drives supported:	Two RLL ESDI drives
Floppy drives supported:	ACB-2320D: None ACB-2322D: Two 360KB, 720KB, 1.2MB, 1.44MB drives

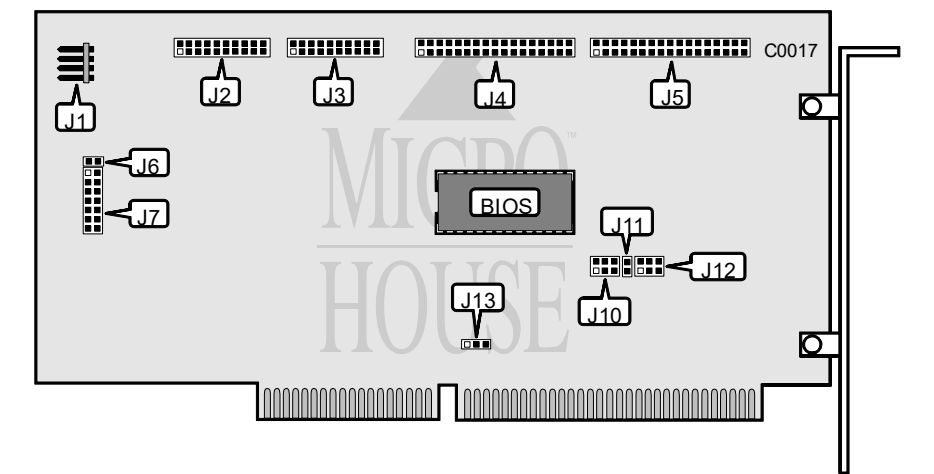

CONNECTIONS	
Function	Location
4-pin connector-drive active LED	J1
20-pin data cable connector-drive 1	J2
20-pin data cable connector-drive 0	J3
34-pin control cable connector-hard drive	J4
34-pin data cable connector-floppy drive	J5

Continued on next page . . .

ADAPTEC, INC.
ACB-2320D, ACB-2322D

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Not used	J7/jumper 1	open
í Logical drive splitting option disabled	J7/jumper 2	open
Logical drive splitting option enabled	J7/jumper 2	closed
í Not used	J7/jumper 3	open
í Not used	J7/jumper 4	open
í Read ahead cache enabled	J7/jumper 5	open
Read ahead cache disabled	J7/jumper 5	closed
í Not used	J7/jumper 6	open
í Not used	J7/jumper 7	open
í Hard drive port address is 1F0-1F7h	J10/jumper 1	open
Hard drive port address is 170-177h	J10/jumper 1	closed
í Floppy drive port address is 3F0-3F7h	J10/jumper 2	open
Floppy drive port address is 370-377h	J10/jumper 2	closed
í Floppy drive enabled	J10/jumper 3	open
Floppy drive disabled	J10/jumper 3	closed
í Single-speed floppy enabled	J11/jumper 1	open
Dual-speed floppy enabled	J11/jumper 1	closed
í Hard Drive Interrupt is IRQ14	J13	pins 1 & 2 closed
Hard Drive Interrupt is IRQ15	J13	pins 2 & 3 closed

BIOS ADDRESS			
Address	J12/jumper 1	J12/jumper 2	J12/jumper 3
í C8000h	open	open	open
CC000h	closed	open	open
D0000h	open	closed	open
D4000h	closed	closed	open
Disabled	open	open	closed
D8000h	closed	open	closed
DC000h	open	closed	closed