


ADAPTEC, INC.  
ACB-2372

Q3/92

Data bus:	16-bit, ISA
Size:	Full-length, full-height card
Hard drives supported:	Two ST506/412, RLL drives
Floppy drives supported:	Two 360KB, 720KB, 1.2MB, 1.44MB drives

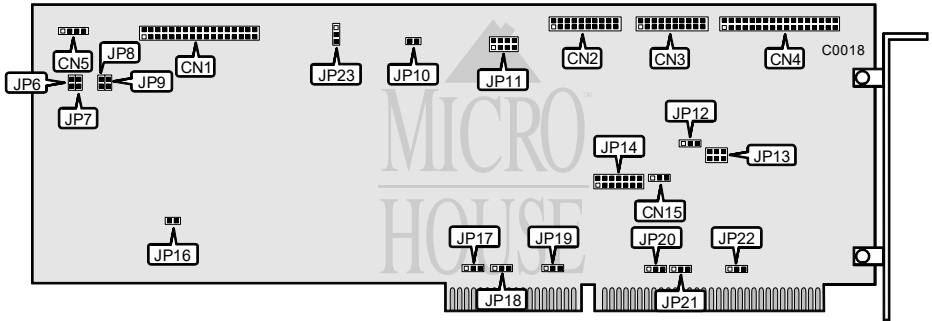

CONNECTIONS	
Function	Location
34-pin control cable connector-floppy drive	CN1
20-pin data cable connector-drive 0	CN2
20-pin data cable connector-drive 1	CN3
34-pin control cable connector-hard drive	CN4
4-pin connector-drive active LED	CN5
Serial Monitor Output	CN15

Continued on next page . . .

# ADAPTEC, INC.

## ACB-2372

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Factory configured - do not alter	JP6 through JP11	open
í BIOS address is C800h	JP12	pins 1 & 2 closed
í BIOS address is CC00h	JP12	pins 2 & 3 closed
í BIOS disabled	JP12	open
í Factory configured - do not alter	JP13	open
í Hard drive port address is 1F0-1F7h	JP14/jumper 1	open
í Hard drive port address is 170-177h	JP14/jumper 1	closed
í Floppy drive port address is 3F0-3F7h	JP14/jumper 2	open
í Floppy drive port address is 370-377h	JP14/jumper 2	closed
í One Wait State enabled	JP14/jumper 3	open
í Zero Wait State enabled	JP14/jumper 3	closed
í Drive Recal (Track 0 minus 1) enabled	JP14/jumper 4	open
í Drive Recal (Track 0 minus 1) disabled	JP14/jumper 4	closed
í Not Used	JP14/jumper 5	open
í Serial Monitor Mode disabled	JP14/jumper 6	open
í Serial Monitor Mode enabled (2400 Baud)	JP14/jumper 6	closed
í Hard drive Interrupt is IRQ14	JP19	pins 1 & 2 closed
í Hard drive Interrupt is IRQ15	JP19	pins 2 & 3 closed
í Not Used	JP19	pins 3 & 4 closed
í Floppy drive DMA Acknowledge is DACK2	JP20	pins 1 & 2 closed
í Floppy drive DMA Acknowledge is DACK3	JP20	pins 2 & 3 closed
í Floppy drive Interrupt is IRQ6	JP21	pins 1 & 2 closed
í Floppy drive Interrupt is IRQ10	JP21	pins 2 & 3 closed
í Floppy drive DMA Request is DREQ2	JP22	pins 1 & 2 closed
í Floppy drive DMA Request is DREQ3	JP22	pins 2 & 3 closed
í Factory configured - do not alter	JP23	N/A