


ADAPTEC, INC.  
AHA-1510

|                          |                               |
|--------------------------|-------------------------------|
| Data bus:                | 16-bit, ISA                   |
| Size:                    | Half-length, full-height card |
| Hard drives supported:   | Up to seven SCSI devices      |
| Floppy drives supported: | None                          |

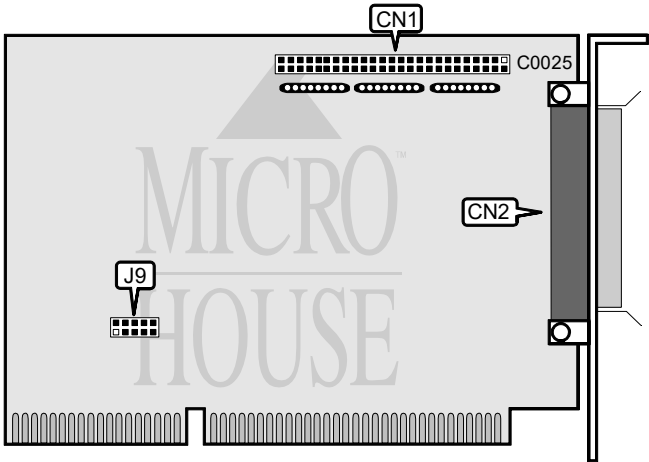

| CONNECTIONS                          |          |  |
|--------------------------------------|----------|--|
| Function                             | Location |  |
| 50-pin SCSI cable connector-internal | CN1      |  |
| 50-pin SCSI cable connector-external | CN2      |  |

| USER CONFIGURABLE SETTINGS   |             |         |
|--|-------------|---------|
| Function   | Location    | Setting |
| I/O port address 340h  | J9/jumper 5 | open    |
| I/O port address 140h  | J9/jumper 5 | closed  |
| Note: If the secondary address, 140h, is selected, the option must be set accordingly in ASPI.SYS. |             |         |

| INTERRUPT REQUEST |             |             |             |             |
|-------------------|-------------|-------------|-------------|-------------|
| Select            | J9/jumper 1 | J9/jumper 2 | J9/jumper 3 | J9/jumper 4 |
| I IRQ11           | open        | closed      | open        | open        |
| IRQ12             | closed      | open        | open        | open        |
| IRQ10             | open        | open        | closed      | open        |
| IRQ9              | open        | open        | open        | closed      |

| MISCELLANEOUS TECHNICAL NOTES  |  |
|--|--|
| The SCSI Disconnection, SCSI Address, SCSI Parity, Sync. Negotiation, I/O Port Address, and Data Transfer Mode options are set by the software driver, ASPI.SYS. |  |