


BEHAVIOR TECH COMPUTER CORPORATION BTC1901

Data bus:	16-bit, ISA
Size:	Half-length, full-height card
Hard drives supported:	Two IDE (AT) Interface drives
Floppy drives supported:	Two 360KB, 720KB, 1.2MB, or 1.44MB

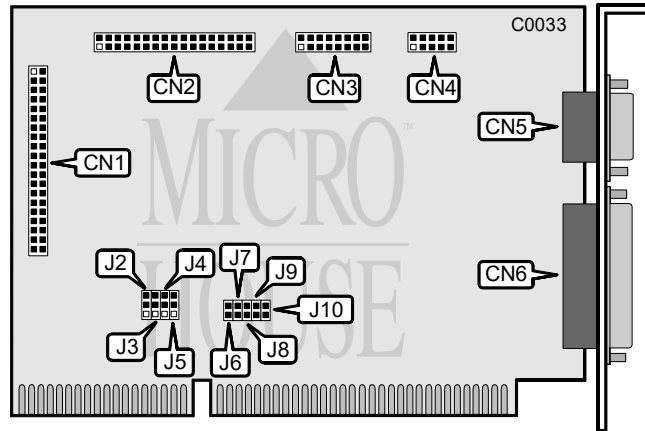

CONNECTIONS	
Function	Location
40-pin AT Interface (IDE) connector-internal	CN1
34-pin control cable connector-floppy disk	CN2
16-pin game port-internal	CN3
9-pin serial port (COM2/4)-internal	CN4
9-pin serial port (COM1/3)-external	CN5
Parallel port (LPT1/2)-external	CN6

Continued on next page . . .

BEHAVIOR TECH COMPUTER CORPORATION

BTC1901

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í IRQ7 (LPT1 interrupt request)	J2	pins 1 & 2 closed
IRQ5 (LPT2 interrupt request)	J2	pins 2 & 3 closed
í CN5 is set to COM1	J3	pins 1 & 2 closed
CN5 is set to COM3	J3	pins 2 & 3 closed
í CN4 is set to COM2	J4	pins 1 & 2 closed
CN4 is set to COM4	J4	pins 2 & 3 closed
í CN6 is set to LPT1	J5	pins 1 & 2 closed
CN6 is set to LPT2	J5	pins 2 & 3 closed
í COM1/3 enabled	J6	closed
COM1/3 disabled	J6	open
í COM2/4 enabled	J7	closed
COM2/4 disabled	J7	open
í LPT1/2 enabled	J8	closed
LPT1/2 disabled	J8	open
í Hard drive enabled	J9	closed
Hard drive disabled	J9	open
í Floppy address 3F0-3F7h	J10	open
Floppy address 370-377h	J10	closed