


CMS ENHANCEMENTS, INC.
AT HOST ADAPTER

Q3/92

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drives supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

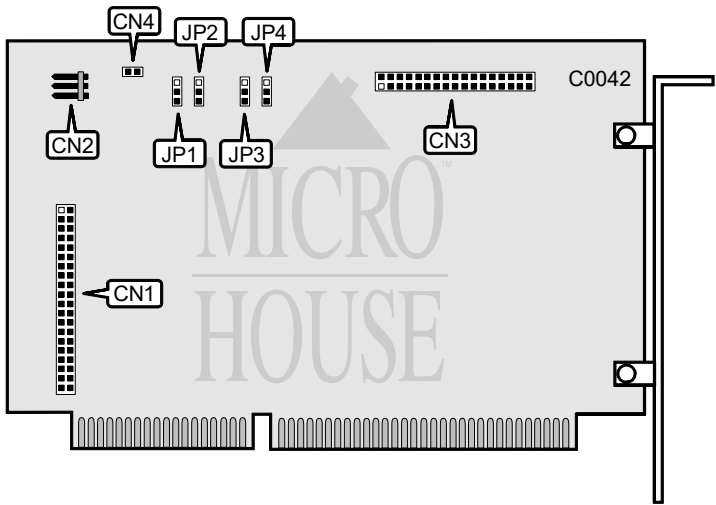

CONNECTIONS		
Function		Location
40-pin AT Interface (IDE) connector		CN1
5-pin connector-DC power		CN2
34-pin data cable connector-floppy drive		CN3
2-pin connector-drive active LED		CN4

USER CONFIGURABLE SETTINGS			
Function		Location	Setting
f Floppy drive address is 3F0-3F7h	Floppy drive address is 370-377h	JP1	pins 1 & 2 closed
			pins 2 & 3 closed
f Hard drive address is 1F0-1F7h	Hard drive address is 170-177h	JP2	pins 1 & 2 closed
			pins 2 & 3 closed
f Floppy drive disabled	Floppy drive enabled	JP3	pins 1 & 2 closed
			pins 2 & 3 closed
f Hard drive enabled	Hard drive disabled	JP4	pins 2 & 3 closed
			pins 1 & 2 closed