


DTK COMPUTER, INC.  
PTI-215

Q1/93

Data bus: 16-bit, ISA  
Size: Half-length, full-height card  
Hard drives supported: Two IDE (AT) Interface drives  
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

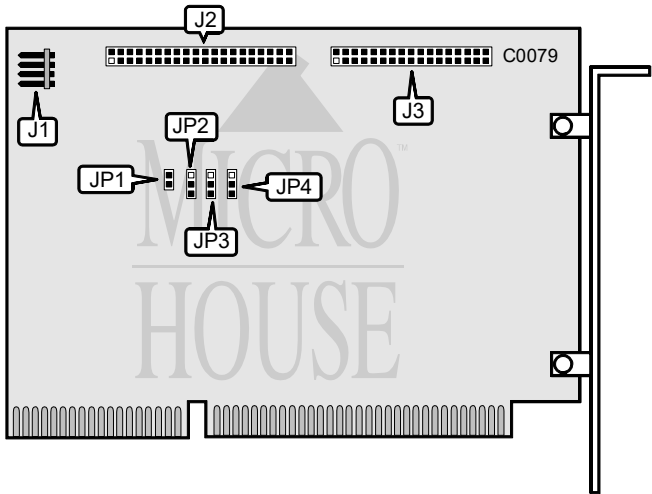

CONNECTIONS	
Function	Location
4-pin connector-drive active LED	J1
40-pin AT Interface (IDE) connector-internal	J2
34-pin data cable connector-floppy drive	J3

Continued on next page . . .

# DTK COMPUTER, INC.

## PTI-215

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive enabled	JP1	closed
Hard drive disabled	JP1	open
í Normal operation	JP2	pins 1 & 2 closed
Supports old IDE drive types (ie: Conner CP-342)	JP2	pins 2 & 3 closed
í Single speed floppy drives	JP3	pins 1 & 2 closed
Dual speed floppy drives	JP3	pins 2 & 3 closed
Precomp. value dependent on data rate as follows: 500Kb/sec = 125ns precomp. 125Kb/sec = 208ns precomp. 125Kb/sec = 250ns precomp. 1000Kb/sec = 83ns precomp.	JP4	pins 1 & 2 closed
Precomp. value dependent on data rate as follows: 500Kb/sec = 125ns precomp. 300Kb/sec = 125ns precomp. 250Kb/sec = 125ns precomp. 1000Kb/sec = 83ns precomp.	JP4	pins 2 & 3 closed