


DISTRIBUTED PROCESSING TECHNOLOGY
PM2001B/90, PM2001B/95

Q3/92

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard drives supported: Up to seven SCSI devices (Enhanced Mode)
Floppy drives supported: PM2001B/90: None
PM2001B/95: Two 360KB, 720KB, 1.2MB, or 1.44MB
Sector interleave: 1:1

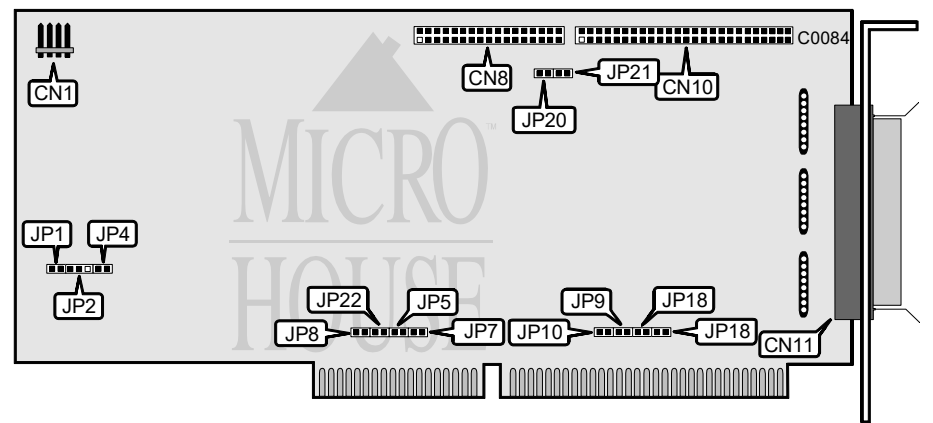

CONNECTIONS	
Function	Location
4-pin connector-drive active LED	CN1
34-pin data cable connector-floppy drive (PM2001/95 only)	CN8
50-pin SCSI connector-internal	CN10
50-pin SCSI connector-external	CN11

Continued on next page . . .

DISTRIBUTED PROCESSING TECHNOLOGY

PM2001B/90, PM2001B/95

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive port address 3F0-3F7h	JP5	open
Floppy drive port address 370-377h	JP5	closed
í BIOS disabled	JP7	open
BIOS enabled	JP7	closed
í Hard drive port address is 1F0-1F7h	JP17	open
Hard drive port address is 170-177h	JP17	closed
í BIOS address is C800h	JP18	open
BIOS address is D800h	JP18	closed
í Floppy drive enabled	JP20	open
Floppy drive disabled	JP20	closed
í Floppy drive head load disabled	JP21	open
Floppy drive head load enabled	JP21	closed

INTERRUPT REQUEST				
IRQ	JP8	JP9	JP10	JP22
Disabled	open	open	open	open
í 14	closed	open	open	open
7	open	closed	open	open
15	open	open	closed	open
12	open	open	open	closed

SCSI ADDRESS			
SCSI I.D.	JP1	JP2	JP4
0	open	open	pins 1 & 2 open
1	closed	open	pins 1 & 2 open
2	open	closed	pins 1 & 2 open
3	closed	closed	pins 1 & 2 open
4	open	open	pins 1 & 2 closed
5	closed	open	pins 1 & 2 closed
6	open	closed	pins 1 & 2 closed
í 7	closed	closed	pins 1 & 2 closed