


DISTRIBUTED PROCESSING TECHNOLOGY PM2012A/90, PM2012A/95

Data bus: 32-bit, EISA
 Size: Full-length, full-height card
 Hard drives supported: Up to seven SCSI devices
 Floppy drives supported: PM2012A/95: Two 360KB, 720KB, 1.2MB, or 1.44MB
 PM2012A/90: None
 Sector interleave: 1:1

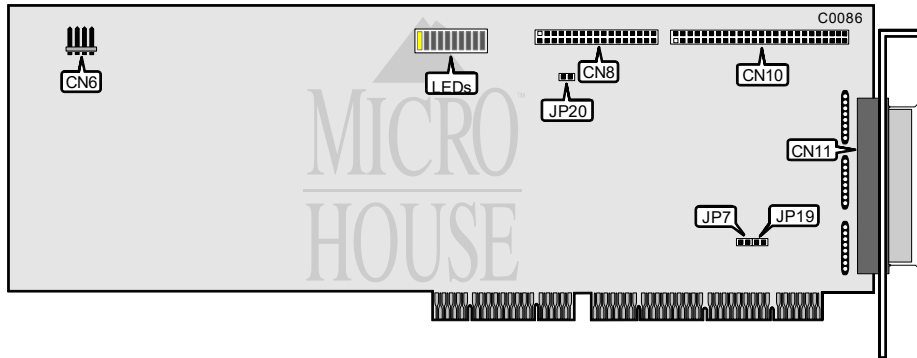

CONNECTIONS	
Function	Location
4-pin connector-drive active LED	CN6
34-pin data cable connector-floppy drive	CN8
50-pin SCSI connector-internal	CN10
50-pin SCSI connector-external	CN11

Continued on next page . . .

DISTRIBUTED PROCESSING TECHNOLOGY

PM2012A/90, PM2012A/95

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í BIOS enabled	JP7	closed
BIOS disabled	JP7	open
í BIOS address C800h	JP19	open
BIOS address D800h	JP19	closed
í Floppy drive enabled	JP20	open
Floppy drive disabled	JP20	closed

LEDz INFORMATION	
Function	Location
Disk controller busy	LED-1
SCSI command in progress	LED-2
SCSI bus disconnected	LED-3
PC/AT transfer to hard disk controller	LED-4
PC/AT transfer from hard disk controller	LED-5
Hard disk transfer to controller	LED-6
Hard disk transfer from controller	LED-7
PC/AT reset to controller	LED-8
Hard disk interrupt to PC/AT	LED-9
DRQ	LED-10