


EVEREX SYSTEMS, INC.

EV-332

Data bus: 16 bit, ISA
 Size: Full-length, full-height card
 Hard drives supported: Two MFM ST506 drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB
 Maximum heads/cyl.: 8 heads and 1024 cylinders

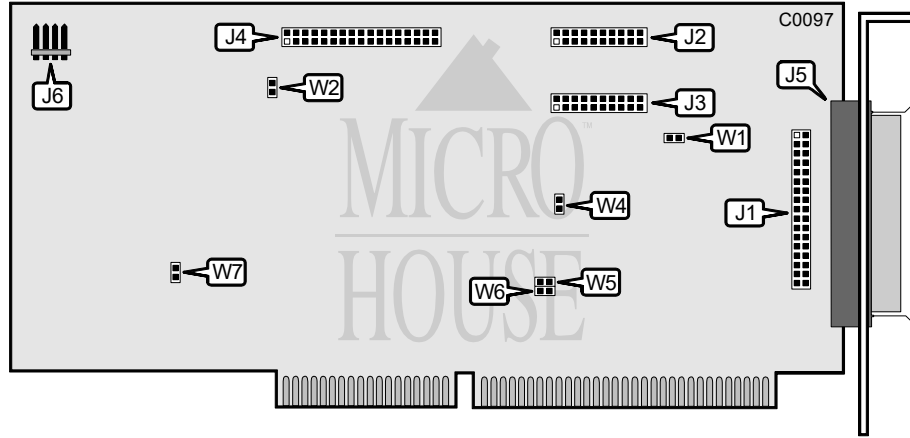

CONNECTIONS	
Function	Location
34-pin control cable connector-hard drive	J1
20-pin data cable connector-drive 0	J2
20-pin data cable connector-drive 1	J3
34-pin data cable connector-floppy drive	J4
37-pin external control cable connector-hard drive	J5
4-pin connector-drive active LED	J6

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Factory configured - do not alter	W1 & W2	closed
Factory configured - do not alter	W4	open
Floppy drive port address is 3F2,3F4-3F7h	W5	open
Floppy drive port address is 372,374-377h	W5	closed
Hard drive port address is 1F0-1F7h	W6	open
Hard drive port address is 170-177h	W6	closed
Factory configured - do not alter	W7	open

