


EVEREX SYSTEMS, INC.
EV-348

Q3/92

Data bus: 16-bit, ISA
Size: Half-length, full-height
Hard drives supported: Two ESDI RLL drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

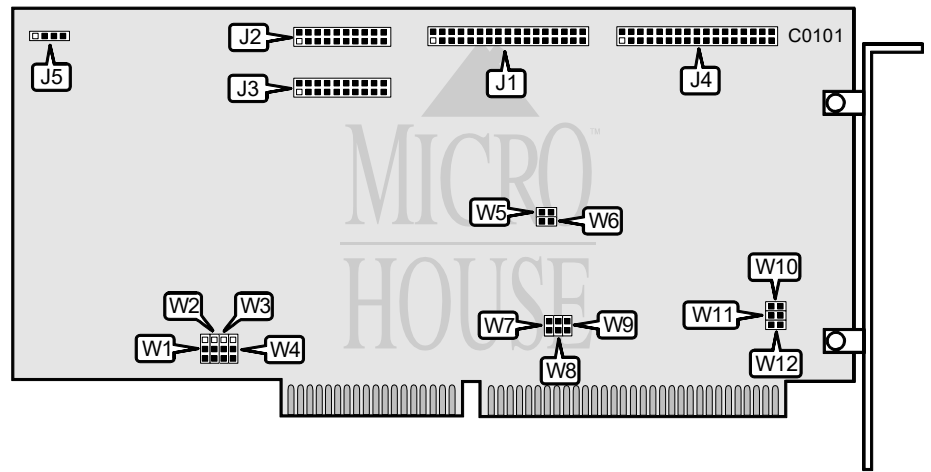

CONNECTIONS	
Function	Location
34-pin control cable connector-hard drive	J1
20-pin data cable connector-drive 0	J2
20-pin data cable connector-drive 1	J3
34-pin control cable connector-floppy drive	J4
4-pin connector-drive active LED	J5

Continued on next page . . .

EVEREX SYSTEMS, INC.

EV-348

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Factory configured buffer size is 32KB	W1 & W3	pins 2 & 3 closed
í Factory configured buffer size is 32KB	W2 & W4	pins 1 & 2 closed
í Hard drive port address is 1F0-1F7h	W7	open
Hard drive port address is 170-177h	W7	closed
í Hard drive interrupt IRQ14 enabled	W8	closed
Hard drive interrupt IRQ14 disabled	W8	open
í Hard drive enabled	W9	closed
Hard drive disabled	W9	open
í Floppy drive enabled	W10	closed
Floppy drive disabled	W10	open
í DACK2 enabled	W11	closed
DACK2 disabled	W11	open
í Floppy drive port address is 3F2-3F7h	W12	open
Floppy drive port address is 372-377h	W12	closed

BIOS ADDRESS		
Address	Jumper W5	Jumper W6
í C8000h	closed	closed
CC000h	open	closed
D4000h	closed	open
Disabled	open	open