


EVEREX SYSTEMS, INC.  
EV-349

Q3/92

Data bus: 16-Bit, ISA  
Size: Half-length, full-height  
Hard drives supported: Two ST506/412 MFM drives  
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB  
Interleave: 1:1

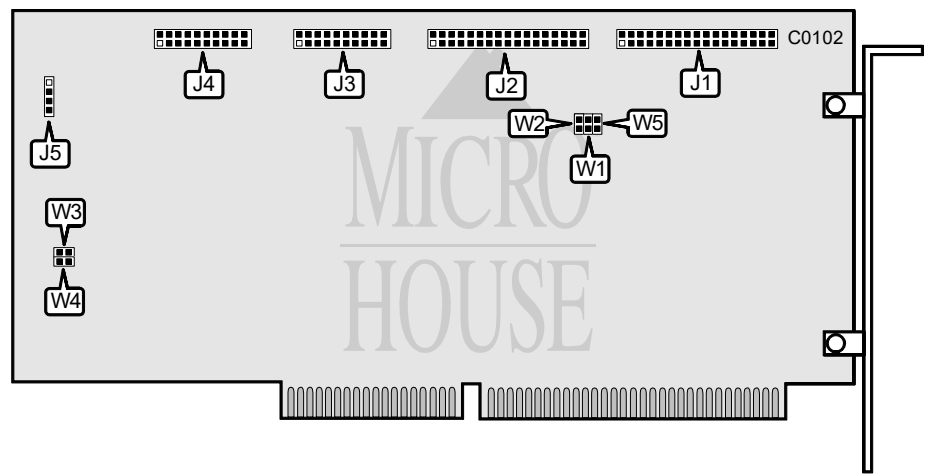

CONNECTIONS	
Function	Location
34-pin control cable connector-floppy drive	J1
34-pin control cable connector-hard drive	J2
20-pin data cable connector-drive 0	J3
20-pin data cable connector-drive 1	J4
4-pin connector-drive active LED	J5

Continued on next page . . .

EVEREX SYSTEMS, INC.  
EV-349

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive port address is 1F0-1F7h Floppy drive port address is 3F0-3F7h	W1	open
Hard drive port address is 170-177h Floppy drive port address is 370-377h	W1	closed
í Single speed floppy supported	W2	open
Dual speed floppy supported	W2	closed
í Factory configured - do not alter	W3 & W4	N/A
í Floppy drive enabled	W5	open
Floppy drive disabled	W5	closed