


FUTURE DOMAIN CORPORATION
TMC-1650, TMC-1670

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard Drives Supported: Up to seven SCSI devices
Floppy Drives Supported: TMC-1650:None
TMC-1670:Two 360KB, 720KB, 1.2MB, or 1.44MB drive

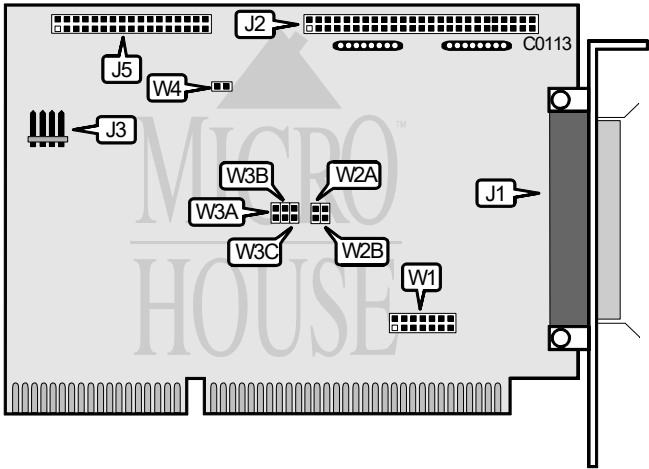

CONNECTIONS	
Function	Location
DB 25 SCSI connector-external	J1
50-pin SCSI connector-internal	J2
4-pin connector-drive active LED	J3
34-pin data cable connector-floppy drive (TMC-1670 only)	J5

Continued on next page . . .

FUTURE DOMAIN CORPORATION

TMC-1650, TMC-1670

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í BIOS enabled	W2A	closed
BIOS disabled	W2A	open
í Memory enabled	W2B	closed
Memory disabled	W2B	open
í Floppy drive enabled (TMC-1670 only)	W3A, W3B, & W3C	closed
Floppy drive disabled (TMC-1670 only)	W3A, W3B, & W3C	open
í Termination power disabled	W4	open
Termination power enabled	W4	closed

INTERRUPT REQUEST			
IRQ	W1 jumper 1	W1 jumper 2	W1 jumper 3
IRQ 3	open	open	open
IRQ 5	closed	open	open
IRQ 10	open	closed	open
IRQ 11	closed	closed	open
IRQ 12	open	open	closed
IRQ 14	closed	open	closed
IRQ 15	open	closed	closed
IRQ disabled	closed	closed	closed

I/O PORT ADDRESS		
Address	W1 jumper 4	W1 jumper 5
í 0140-014Fh	open	open
0150-015Fh	closed	open
0160-016Fh	open	closed
0170-017Fh	closed	closed

BIOS ADDRESS		
Address	W1 jumper 6	W1 jumper 7
í C8000h	open	open
CA000h	closed	open
CE000h	open	closed
DE000h	closed	closed