


JPN CORPORATION
CA8390

Q3/92

Data bus: 16-bit, ISA
Size: Half-length, half-height card
Hard drives supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

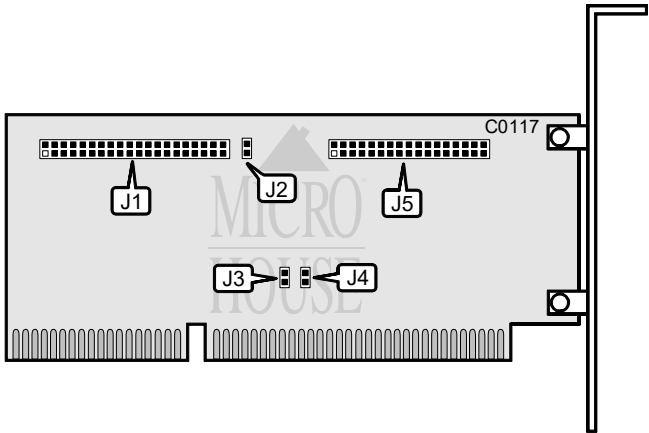

CONNECTIONS		
Function		Location
40-pin IDE (AT) Interface connector-internal		J1
2-pin connector-drive active LED		J2
34-pin control cable-floppy drive		J5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
<input type="checkbox"/> Hard drive enabled	J3	closed
Hard drive disabled	J3	open
<input type="checkbox"/> Floppy drive enabled	J4	closed
Floppy drive disabled	J4	open