


MULTIBEST INDUSTRIAL & MANUFACTURING INC.
TRUMP CARD

Q3/92

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drives supported: Two AT Interface (IDE) drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

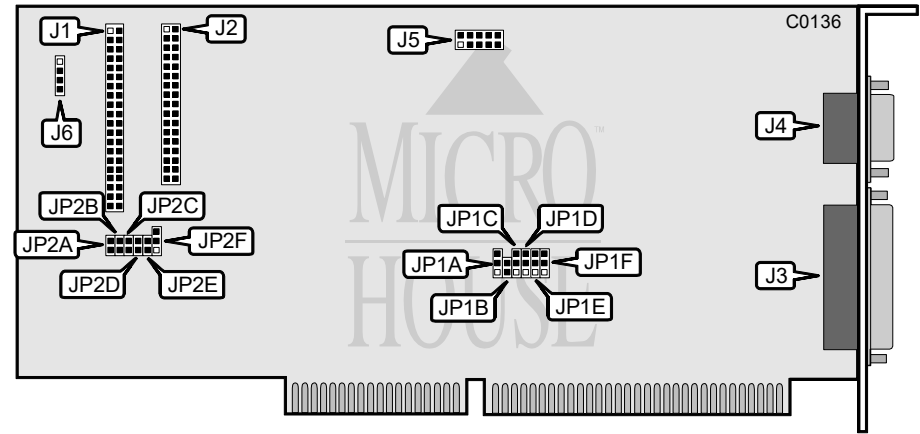

CONNECTIONS	
Function	Location
40-pin AT Interface (IDE) connector-internal	J1
34-pin control cable connector floppy drive	J2
25-pin parallel port (LPT1/2)-external	J3
9-pin serial port (COM1/3) external	J4
9-pin serial port (COM2/4) internal	J5

Continued on next page . . .

MULTIBEST INDUSTRIAL & MANUFACTURING INC.

TRUMP CARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Hard drive enabled	JP2B	closed
Hard drive disabled	JP2B	open
í Single speed floppy drives	JP2E	open
Dual speed floppy drives	JP2E	closed
í Direct IRQ	JP2F	pins 1 & 2 closed
Delay IRQ (used when drive has difficulty)	JP2F	pins 2 & 3 closed

FLOPPY DRIVE CONFIGURATION		
Function	JP2C	JP2D
Enabled	closed	closed
Disabled	open	open

PARALLEL PORT CONFIGURATION			
LPT	JP1A	JP1B	JP2A
LPT1 enabled	pins 2 & 3 closed	closed	open
LPT2 enabled	pins 1 & 2 closed	closed	closed
Disabled	pins 1 & 2 closed	open	pins 1 & 2 closed

SERIAL PORT CONFIGURATION		
Port 1	JP1C & JP1D	JP1E & JP1F
í COM1 (CN4)	N/A	pins 1 & 2 closed
COM3 (CN4)	N/A	pins 2 & 3 closed
COM2 (CN5)	pins 1 & 2 closed	N/A
COM4 (CN5)	pins 2 & 3 closed	N/A