


NCL AMERICA
NCL 5125

Q4/92

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard Drives Supported: Two ST506/412 drives
Floppy Drives Supported: Two 320KB, 720KB, 1.2 MB or 1.44 MB drives

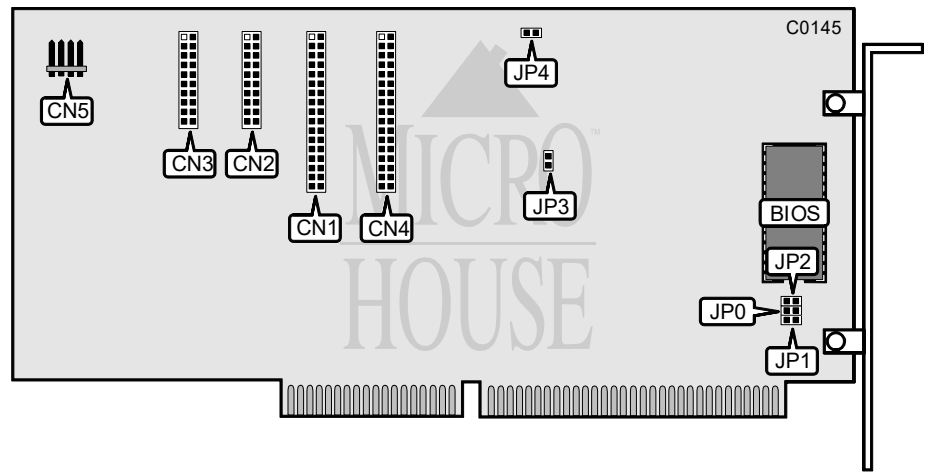

CONNECTIONS		
Function		Location
34-pin control cable connector-hard drive		CN1
20-pin data cable connector-drive 0		CN2
20-pin data cable connector-drive 1		CN3
34-pin data cable connector-floppy drive		CN4
4-pin connector-drive active LED		CN5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Hard drive port address is 1F0-1F7h	JP0	open
Hard drive port address is 170-177h	JP0	closed
Floppy drive port address is 3F2-3F7h	JP1	open
Floppy drive port address is 372-177h	JP1	closed
Factory configured - do not alter	JP2, JP3, & JP4	closed

