


COMPEX, INC. ENET-TP/U (Revision A1)

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Star
Wiring Type	Shielded/Unshielded Twisted Pair
	AUI transceiver via DB-15 port
Boot ROM	Available

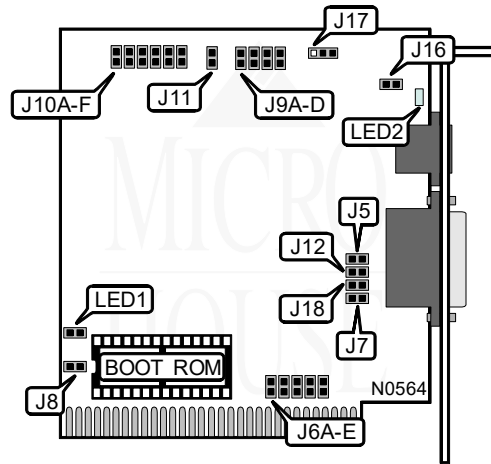

NETWORK VERSION	
Version	J5
iEthernet version 2	Open
Ethernet version 1	Closed

INTERRUPT REQUEST					
IRQ	J6A	J6B	J6C	J6D	J6E
2	Closed	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open
4	Open	Open	Closed	Open	Open
5	Open	Open	Open	Closed	Open
7	Open	Open	Open	Open	Closed

WAIT STATE	
Setting	J7
iUse preset 8-bit bus wait states	Open
Use 2 wait states (6MHz or slower bus speed)	Closed

Continued on next page . . .

COMPEX, INC.

ENET-TP/U (Revision A1)

... continued from previous page

I/O BASE ADDRESS				
Address	J9A	J9B	J9C	J9D
200h	Closed	Closed	Closed	Closed
220h	Closed	Closed	Closed	Open
240h	Closed	Closed	Open	Closed
260h	Closed	Closed	Open	Open
i280h ¹	Closed	Open	Closed	Closed
2A0h	Closed	Open	Closed	Open
2C0h	Closed	Open	Open	Closed
2E0h	Closed	Open	Open	Open
i300h ²	Open	Closed	Closed	Closed
320h	Open	Closed	Closed	Open
340h	Open	Closed	Open	Closed
360h	Open	Closed	Open	Open
380h	Open	Open	Closed	Closed
3A0h	Open	Open	Closed	Open
3C0h	Open	Open	Open	Closed
3E0h	Open	Open	Open	Open
Note ¹ : This setting is to be used when the card is in "WD MODE" (see below).				
Note ² : This setting is to be used when the card is in "NE MODE" (see below).				

BOOT ROM ADDRESS						
Address	J10A	J10B	J10C	J10D	J10E	J10F
C0000	Open	Closed	Closed	Closed	Closed	Closed
C2000	Open	Closed	Closed	Closed	Closed	Open
C4000	Open	Closed	Closed	Closed	Open	Closed
C6000	Open	Closed	Closed	Closed	Open	Open
iC8000 ²	Open	Closed	Closed	Open	Closed	Closed
CA000	Open	Closed	Closed	Open	Closed	Open
CC000	Open	Closed	Closed	Open	Open	Closed
CE000	Open	Closed	Closed	Open	Open	Open
D0000	Open	Closed	Open	Closed	Closed	Closed
iD2000 ¹	Open	Closed	Open	Closed	Closed	Open
D4000	Open	Closed	Open	Closed	Open	Closed
D6000	Open	Closed	Open	Closed	Open	Open
D8000	Open	Closed	Open	Open	Closed	Closed
DA000	Open	Closed	Open	Open	Closed	Open
DC000	Open	Closed	Open	Open	Open	Closed
DE000	Open	Closed	Open	Open	Open	Open
Note ¹ : This setting is to be used when the card is in "WD MODE" (see below).						
Note ² : This setting is to be used when the card is in "NE MODE" (see below).						

Continued on next page ...

COMPEX, INC.
ENET-TP/U (Revision A1)

... continued from previous page

BOOT ROM		
Setting	J8	
Disabled	Open	
Enabled	Closed	

NIC MODE		
Mode	J11	
"WD MODE" - running the ENETCPX, ED8003, or WDPLUS driver	Closed	
"NE MODE" - running the NOVELL NE1000 driver	Open	

I/O CHANNEL READY WAIT STATES		
Setting	J12	
Use 4 wait states when #IOCHRDY active	Closed	
Use 2 wait states when #IOCHRDY active	Open	

CABLE TYPE		
Cable Type	J16	
Shielded/Unshielded Twisted Pair	Closed	
AUI transceiver via DB-15 port	Open	

LINK INTEGRITY TEST		
Setting	J17	
Enabled	Pins 1 & 2 closed	
Disabled	Pins 2 & 3 closed	

DATA BUS SIZE		
Setting	JP18	
16-bit	Closed	
8-bit	Open	

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Data is being transmitted or received
LED1	Off	Data is not being transmitted or received
LED2	On	Link is correctly configured
LED2	Off	Link is incorrectly configured