


SEAGATE TECHNOLOGY, INC.
ST02, ST02-E50

Q3/92

Data bus: 8-bit, ISA
Size: Half-length, full-height card
Hard drives supported: Up to seven SCSI devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

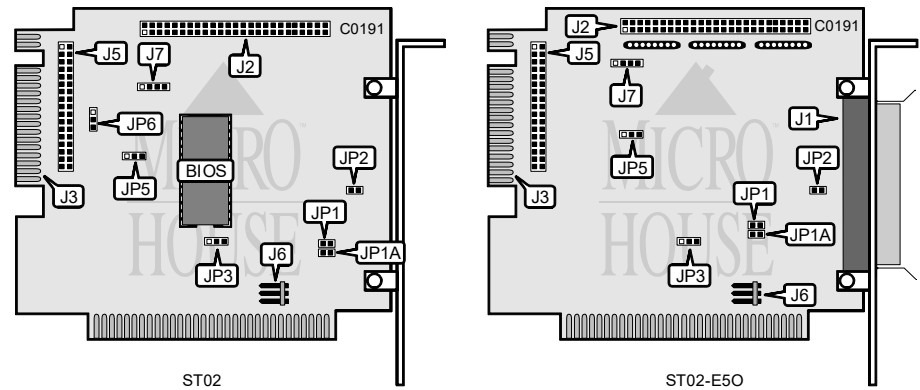

CONNECTIONS	
Function	Location
50-pin SCSI connector-external (ST02-E50 only)	J1
50-pin SCSI connector-internal	J2
34-pin data cable connector-XT floppy drive	J3
34-pin data cable connector-AT floppy drive	J5
5-pin connector-DC power	J6
4-pin connector-drive active LED	J7

16K BIOS ADDRESS		
Select	Jumper JP1	Jumper JP1A
f C800h	open	open
Not valid	closed	open
CC00h	open	closed
DC00h	closed	closed

Continued on next page . . .

SEAGATE TECHNOLOGY, INC.

ST02, ST02-E50

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Zero wait state disabled	JP2	open
Zero wait state enabled	JP2	closed
í Interrupts disabled	JP3	open
Hard Drive Interrupt is IRQ5	JP3	pins 2 & 3 closed
Hard Drive Interrupt is IRQ3	JP3	pins 1 & 2 closed
í 360K/720K/1.2MB and 1.44MB	JP5	pins 2 & 3 closed
360K/720K only	JP5	pins 1 & 2 closed
í Enable for PC/XT, 286 and PC/AT	JP6	pins 2 & 3 closed
Disable for PC/XT	JP6	pins 1 & 2 closed