


SEAGATE TECHNOLOGY, INC.
ST05A

Data bus:	16-bit, ISA
Size:	Half-length, full-height card
Hard drives supported:	Two IDE (AT) Interface drives
Floppy drives supported:	Two 360KB, 720KB, 1.2MB, or 1.44MB

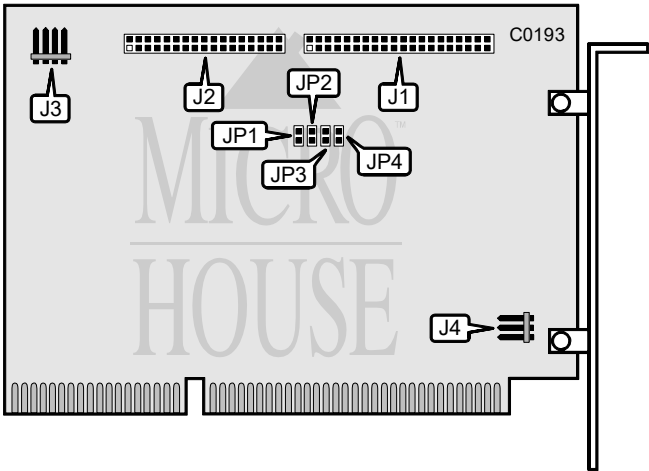

CONNECTIONS	
40-pin IDE Interface (AT) control cable connector-internal	J1
34-pin data cable connector-floppy drive	J2
4-pin connector-drive active LED	J3
5-pin connector-DC power	J4

Continued on next page . . .

SEAGATE TECHNOLOGY, INC.

ST05A

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive port address is 3F0-3F7h	JP3	open
Floppy drive port address is 370-377h	JP3	closed
í Floppy drive enabled	JP4	open
Floppy drive disabled	JP4	closed

BIOS ROM ADDRESS		
Address	JP1	JP2
í BIOS ROM address is C800-CBFFFh	open	open
BIOS ROM address is D800-DBFFFh	open	closed
BIOS ROM address is D000-D3FFFh	closed	open
BIOS ROM address is E000-E3FFFh	closed	closed