


# WESTERN DIGITAL CORPORATION

## WD1002-WA2

Q3/92

Data bus: 16-bit, PC/AT  
 Size: Full-length, full-height card  
 Hard drives supported: Two MFM ST506/412 drives  
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

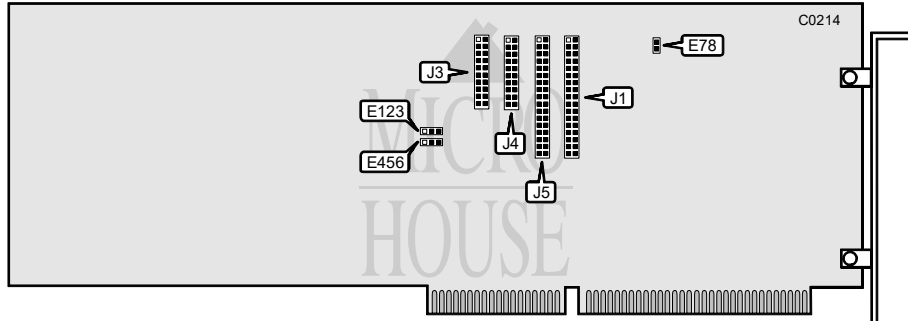

CONNECTIONS	
Function	Location
34-pin data cable connector-floppy drive	J1
20-pin data cable connector-drive 1	J3
20-pin data cable connector-drive 0	J4
34-pin control cable connector-hard drive	J5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Floppy drive port address is 3F2h, 3F4-3F7h	E1	pins 2 & 3 closed
Floppy drive port address is 372h, 374-377h	E1	pins 1 & 2 closed
f Hard drive port address is 1F0-1F7h & 3F6-3F7h	E2	pins 2 & 3 closed
Hard drive port address is 170-177h & 376-377h	E2	pins 1 & 2 closed
f Factory configured - do not alter	E3	closed