


WESTERN DIGITAL CORPORATION
WDAT-240

Q2/92

Data bus: 16-bit, PC/AT
Size: Half-length, full-height card
Hard drives supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB

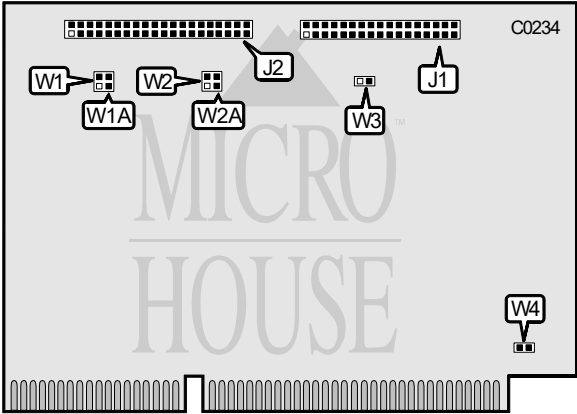

CONNECTIONS		
Function		Location
34-pin data cable connector-floppy drive		J1
40-pin AT Interface (IDE) control cable connector-internal		J2

DIRQ14 SIGNAL SELECT		
Function	Jumper W1	Jumper W1A
DIRQ14 signal passed to host computer	open	closed
Conner CP342/CP3022 in true IBM AT	closed	open

Continued on next page . . .

WESTERN DIGITAL CORPORATION
WDAT-240

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy controller enabled	W2	closed
Floppy controller disabled	W2	open
í Floppy drive port address is 3F0-3F7h	W2A	open
Floppy drive port address is 370-377h	W2A	closed
í Single speed floppy drive	W3	open
Dual-speed floppy drive	W3	closed
í Logic ground independent of chassis	W4	open
Logic ground connected to chassis	W4	closed