


WESTERN DIGITAL CORPORATION
WDXT-150

Data bus:	8-bit, PC/XT
Size:	Half-length, full-height card
Hard drives supported:	One IDE (XT) interface drives
Floppy drives supported:	None
Maximum heads/cyl.:	8 heads and 1024 cylinders

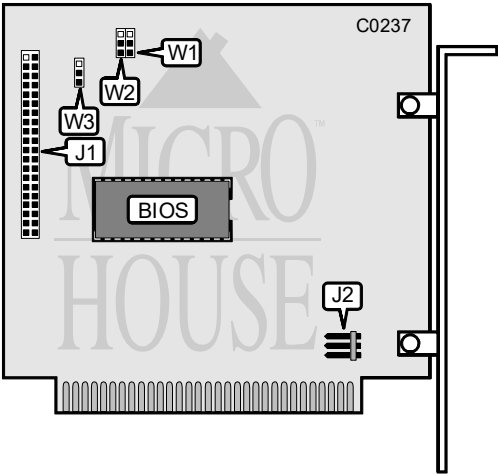

CONNECTIONS	
Function	Location
40-pin IDE (XT) Interface control cable connector-internal	J1
5-pin connector-DC power	J2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i BIOS address is CA00h	W1	pins 1 & 2 closed
BIOS address is C800h	W1	pins 2 & 3 closed
i I/O port address is 320h	W2	pins 1 & 2 closed
I/O port address is 324h	W2	pins 2 & 3 closed
i Hardware interrupt is IRQ5	W3	pins 1 & 2 closed
Hardware interrupt is IRQ4	W3	pins 2 & 3 closed

