


ASUS AMERICA, INC.
EISA-SC100

Q1/93

Data bus: 32-bit, EISA
Size: Full-length, full-height card
Hard drives supported: Two SCSI drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

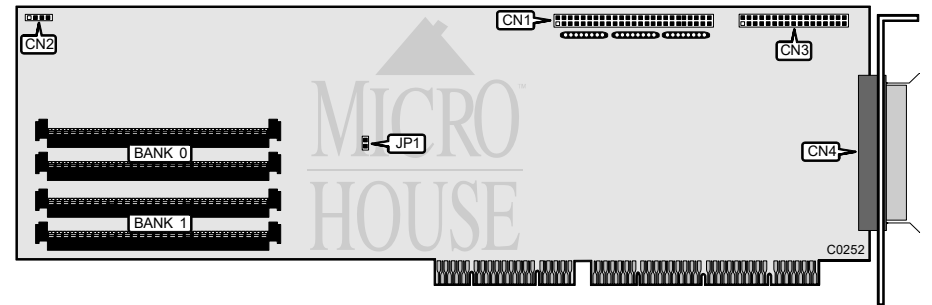

CONNECTIONS	
Function	Location
50-pin SCSI cable connector-internal	CN1
4-pin connector-drive active LED	CN2
34-pin data cable connector-floppy drives	CN3
50-pin SCSI cable connector-external	CN4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Normal configuration mode (EISA-SC100 must be configured through the set-up utility)	JP1	open
Default configuration mode (EISA-SC100 configured for default settings)	JP1	closed

CACHE MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256KB x 9	none
1MB	(2) 256KB x 9	(2) 256KB x 9
2MB	(2) 1MB x 9	none
4MB	(2) 1MB x 9	(2) 1MB x 9
8MB	(2) 4MB x 9	none
16MB	(2) 4MB x 9	(2) 4MB x 9
Note: (80nsec or 70/60 or faster Fast Page mode SIMMS supported)		