


## CONNER PERIPHERALS, INC. AT ADAPTER BOARD

Q1/93

Data bus: 16-bit, ISA  
 Size: Half-length, full-height card  
 Hard drives supported: Two IDE Interface (AT) drives  
 Floppy drives supported: None

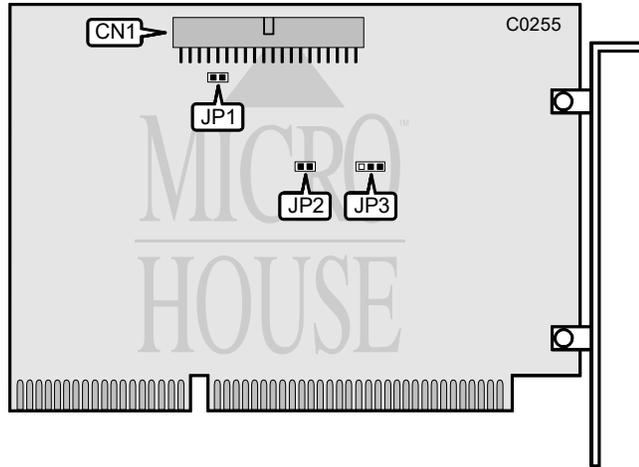

CONNECTIONS	
Function	Location
40-pin IDE Interface (AT) connector-internal	CN1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Hard drive port address is 1F0-1F7h	JP1	open
Hard drive port address is 170-177h	JP1	closed
Chip Select 1 (CS1) enabled	JP2	closed
Chip Select 1 (CS1) disabled	JP2	open
IRQ14 is cleared with a status read only	JP3	pins 2 & 3 closed
IRQ14 is cleared with deassertion of Host Slv/Act	JP3	pins 1 & 2 closed