


DTK COMPUTER, INC.  
PTI-220

Q1/93

Data bus: 16-bit, ISA  
Size: Half-length, full-height card  
Hard drives supported: Two ST506/412 MFM drives  
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

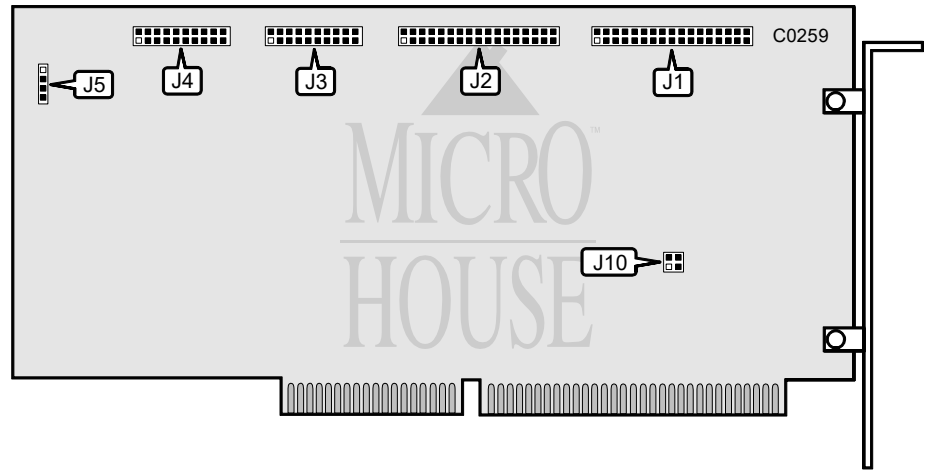

CONNECTIONS	
Function	Location
34-pin data cable connector-floppy drives	J1
34-pin control cable connector-hard drives	J2
20-pin data cable connector-Drive 0	J3
20-pin data cable connector-Drive 1	J4
4-pin connector-drive active LED	J5

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Hard drive port address is 1F0-1F7h	JP10	pins 1 & 2 open
Hard drive port address is 170-177h	JP10	pins 1 & 2 closed
Floppy drive port address is 3F0-3F7h	JP10	pins 3 & 4 open
Floppy drive port address is 370-377h	JP10	pins 3 & 4 closed

