


FUTURE DOMAIN CORPORATION
TMC-850M, TMC-850MER, TMC-850MEX, TMC-850RL

Q1/93

Data bus: 8-bit, ISA
Size: Half-length, full-height card
Hard drives supported: Up to seven SCSI devices
Floppy drives supported: None

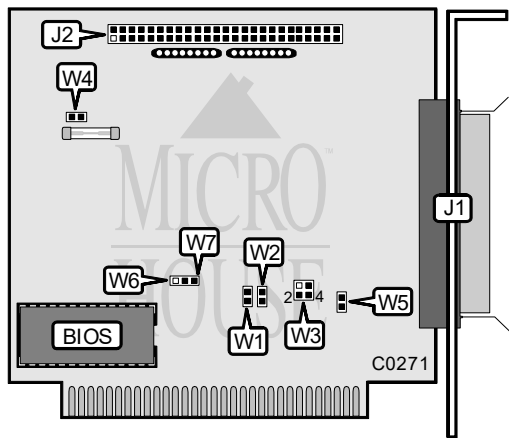

CONNECTIONS	
Function	Location
25-pin SCSI connector-external	J1
50-pin SCSI connector-internal	J2

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Termination power enabled	W4	closed
Termination power disabled	W4	open
Zero wait state disabled	W5	open
Zero wait state enabled	W5	closed
Interrupt Request is IRQ5	W7	closed (pins 2 & 3)
Interrupt Request is IRQ3	W6	closed (pins 1 & 2)

Continued on next page . . .

FUTURE DOMAIN CORPORATION
TMC-850M, TMC-850MER, TMC-850MEX, TMC-850RL

. . . continued from previous page

BIOS ADDRESS SELECTION			
Address	W1	W2	W3
í CA00h	open	open	pins 1 & 2, 3 & 4 closed
C800h	closed	open	pins 1 & 2, 3 & 4 closed
CE00h	open	closed	pins 1 & 2, 3 & 4 closed
DE00h	closed	closed	pins 1 & 2, 3 & 4 closed
E800h	open	open	pins 1 & 3, 2 & 4 closed
EC00h	open	closed	pins 1 & 3, 2 & 4 closed

MISCELLENAUS TECHNICAL NOTES	
In some version there is an extra terminating resistor and jumper W4 does not exist.	