


FUTURE DOMAIN CORPORATION
TMC-880, TMC-881

Q1/93

Data bus: 16-bit, ISA
Size: Full-length, full-height card
Hard drives supported: Up to seven SCSI devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

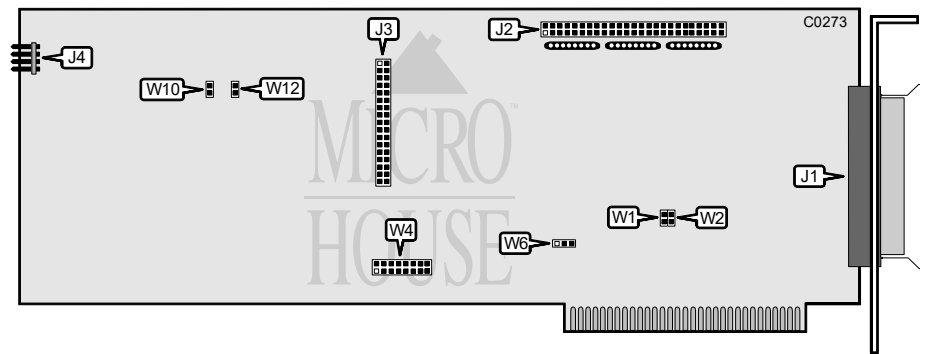

CONNECTIONS	
Function	Location
25-pin SCSI Interface connector-external	J1
50-pin SCSI Interface connector-internal	J2
34-pin data cable connector-floppy drives	J3
4-pin connector-drive active LED	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Time-out delay is short	W6	pins 1 & 2 closed
Time-out delay is long	W6	pins 2 & 3 closed
i Floppy drive port address is 3F2-3F7h	W10	open
Floppy drive port address is 372-377h	W10	closed
i Hard drive port address is 1F0-1F7h	W12	open
Hard drive port address is 170-177h	W12	closed

Continued on next page . . .

FUTURE DOMAIN CORPORATION

TMC-880, TMC-881

... continued from previous page

INTERRUPT REQUEST								
IRQ	W4/1	W4/2	W4/3	W4/4	W4/5	W4/6	W4/7	W4/8
IRQ3	closed	open	open	open	open	open	open	open
IRQ4	open	closed	open	open	open	open	open	open
IRQ5	open	open	closed	open	open	open	open	open
IRQ10	open	open	open	closed	open	open	open	open
IRQ11	open	open	open	open	closed	open	open	open
IRQ12	open	open	open	open	open	closed	open	open
IRQ14	open	open	open	open	open	open	closed	open
IRQ15	open	open	open	open	open	open	open	closed

BIOS ADDRESS		
Address	W1	W2
CA00h	open	open
C800h	open	closed
CE00h	closed	open
DE00h	closed	closed