


NCL AMERICA
NCL 539C

Q1/93

Data bus:	16-bit, ISA
Size:	Half-length, full-height card
Hard drives supported:	Two IDE (AT) Interface drives
Floppy drives supported:	None

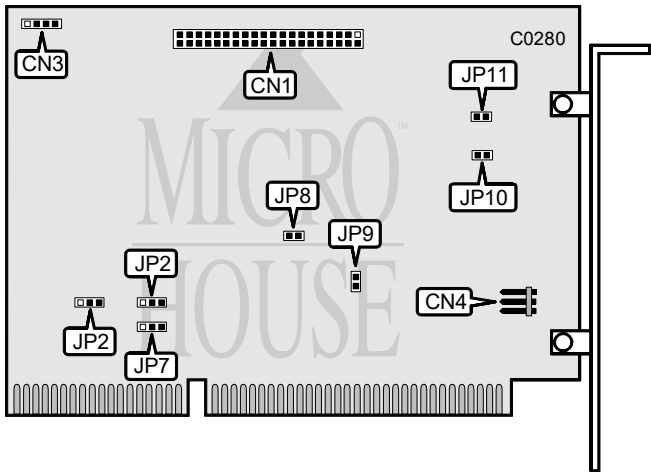

CONNECTIONS	
Function	Location
40-pin IDE (AT) Interface connector-internal	CN2
4-pin connector-drive active LED	CN3
5-pin connector-DC Power	CN4

Continued on next page . . .

NCL AMERICA

NCL 539C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í BIOS address is DC00h	JP2	pins 1-2 closed
BIOS address is CC00h	JP2	pins 2-3 closed
í IRQ connected directly to host	JP5	pins 1-2 closed
IRQ Buffer mode enabled	JP5	pins 2-3 closed
í Interrupt request is IRQ15	JP7	pins 2-3 closed
Interrupt request is IRQ14	JP7	pins 1-2 closed
í I/O Channel Ready disabled	JP8	open
I/O Channel Ready enabled	JP8	closed
í BIOS enabled	JP9	closed
BIOS disabled	JP9	open
í Hard drive port address is 170-177h	JP10	closed
Hard drive port address is 1F0-1F7h	JP10	open
í Normal Operation	JP11	open
Diagnostic Mode	JP11	closed