


SILICON VALLEY COMPUTER, INC.  
ADP60

Q1/93

Data bus: 16-bit, ISA  
Size: Half-length, full-height card  
Hard drives supported: Two IDE (AT) Interface drives  
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

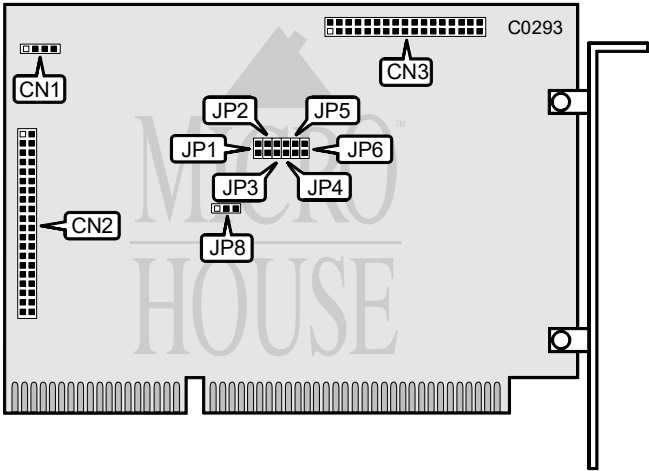

CONNECTIONS	
Function	Location
4-pin connector-drive active LED	CN1
40-pin IDE (AT) Interface connector-internal	CN2
34-pin data cable connector-floppy drive	CN3

Continued on next page . . .

# SILICON VALLEY COMPUTER, INC.

## ADP60

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
f Floppy drive enabled	JP1	open
Floppy drive disabled	JP1	closed
f Single-speed floppy drive supported	JP2	open
Dual-speed floppy drive supported	JP2	closed
f Floppy drive precompensation is 187nsec.	JP3	open
Floppy drive precompensation is 125nsec	JP3	closed
f Hard drive port address 1F0-1F7h	JP4	open
Hard drive port address 170-177h	JP4	closed
f BIOS address is C800	JP5	open
BIOS address is CA00	JP5	closed
f BIOS ROM size is 8KB	JP6	open
BIOS ROM size is 16KB	JP6	closed
BIOS enabled	JP7	closed
f BIOS enabled	JP8	pins 1 & 2 closed
BIOS disabled	JP8	pins 2 & 3 closed