


WESTERN DIGITAL CORPORATION

WD1003S-WA4

Q1/93

Data bus: 16-bit, ISA
 Size: Full-length, half-height card
 Hard drives supported: Two ST506/412 MFM drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

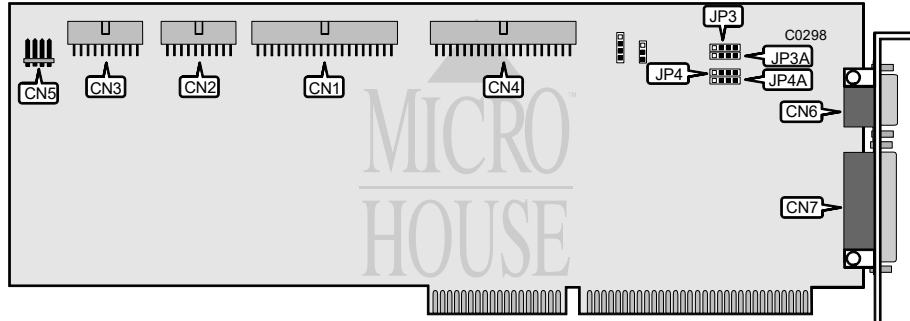

CONNECTIONS	
Function	Location
34-pin control cable connector-hard drive	CN1
20-pin data cable connector-drive 0	CN2
20-pin data cable connector-drive 1	CN3
34-pin data cable connector-floppy drive	CN4
4-pin connector-drive active LED	CN5
DB-9 serial port 1 connector-external	CN6
DB-25 parallel port connector-external	CN7

USER CONFIGURABLE JUMPERS		
Function	Location	Setting
í Floppy drive port address is 3F0-3F7h	JP1	pins 3 & 4 closed
Floppy drive disabled	JP1	pins 2 & 3 closed
Floppy drive port address is 370-377h	JP1	pins 1 & 2 closed
í Hard drive port address is 1F0-1F7h	JP2	pins 2 & 3 closed
Hard drive port address is 170-177h	JP2	pins 2 & 3 closed
í Parallel port is set for LPT1	JP3 and JP3A	pins 1 & 2 closed
Parallel port disabled	JP3 and JP3A	pins 2 & 3 closed
Parallel port is set for LPT2	JP3 and JP3A	pins 3 & 4 closed
í Serial port is set for COM1	JP4 and JP4A	pins 1 & 2 closed
Serial port is disabled	JP4 and JP4A	pins 2 & 3 closed
Serial port is set for COM2	JP4 and JP4A	pins 3 & 4 closed