


UNIDENTIFIED SUN-5231

Q1/93

Data bus: 16-bit, ISA
 Size: Half-length, full-height card
 Hard drives supported: Up to seven SCSI devices
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

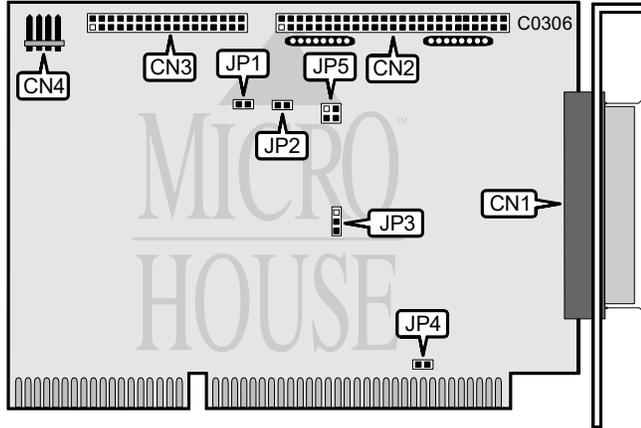

CONNECTIONS	
Function	Location
25-pin SCSI Interface connector-external	CN1
50-pin SCSI Interface connector-internal	CN2
34-pin data cable connector-floppy drives	CN3
4-pin connector-drive active LED	CN4

Continued on next page . . .

UNIDENTIFIED
SUN-5231

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive port address is 3F0-3F7h	JP1	open
Floppy drive port address is 370-377h	JP1	closed
í Floppy drive enabled	JP2	open
Floppy drive disabled	JP2	closed
í Interrupt Request is IRQ3	JP3	pins 1 & 2 closed
Interrupt Request is IRQ5	JP3	pins 2 & 3 closed
í Zero Wait State enabled	JP4	open
Zero wait State disabled	JP4	closed

BIOS ADDRESS		
Address	JP5/pins 1 & 2	JP5/pins 3 & 4
í CA00h	open	open
C800h	closed	open
CE00h	open	closed
DE00h	closed	closed