Q4/93


FUTURE DOMAIN CORPORATION TMC-860M, TMC-885M

Data bus: 8-bit, ISA

Size: Three/quarter-length, full-height card

Hard drive supported: Up to seven SCSI devices

Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives (TMC-885M only)

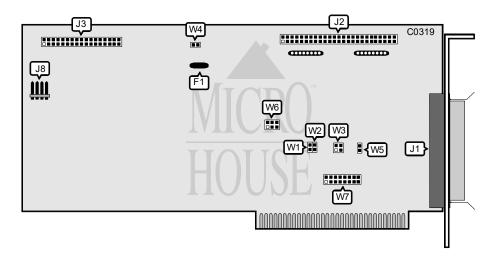

CONNECTIONS					
Function	Location				
Poly Switch Thermal Fuse	F1				
DB2 SCSI cable connector - external	J1				
50-pin SCSI cable connector - internal	J2				
34-pin control cable connector - floppy drive (TMC-885M only)	J3				
4-pin connector - Drive active LED	J8				

BIOS ADDRESS							
Address	Jumper W1	Jumper W1 Jumper W2					
í CA00h	open	open	closed vertically				
C800h	open	closed	closed vertically				
CE00h	closed	open	closed vertically				
DE00h	closed	closed	closed vertically				
E800h	open	open	closed horizontally				
EC00h	closed	open	closed horizontally				

Continued on next page . . .

FUTURE DOMAIN CORPORATION TMC-860M, TMC-885M

. . . continued from previous page

USER CONFIGURABLE SETTINGS					
Function	Location	Setting			
í Termination Power enabled	W4	closed			
Termination Power disabled	W4	open			
í Zero Wait State disabled	W5	open			
Zero Wait State enabled	W5	closed			
í Floppy drive enabled	W6/jumpers 1-3	closed			
Floppy drive disabled	W6/jumpers 1-3	open			

INTERRUPT REQUEST								
IRQ	W7/1	W7/2	W7/3	W7/4	W7/5	W7/6	W7/7	W7/8
í Disabled	open							
IRQ3	closed	open						
IRQ4	open	closed	open	open	open	open	open	open
IRQ5	open	open	closed	open	open	open	open	open
IRQ10	open	open	open	closed	open	open	open	open
IRQ11	open	open	open	open	closed	open	open	open
IRQ12	open	open	open	open	open	closed	open	open
IRQ14	open	open	open	open	open	open	closed	open
IRQ15	open	closed						