


MULTI-TECH SYSTEMS, INC. ISI608PC

Card Type	Serial interface
Chipset Controller	Unidentified
I/O Options	Serial ports (8)
Maximum Dram	2MB (factory installed, unknown location)

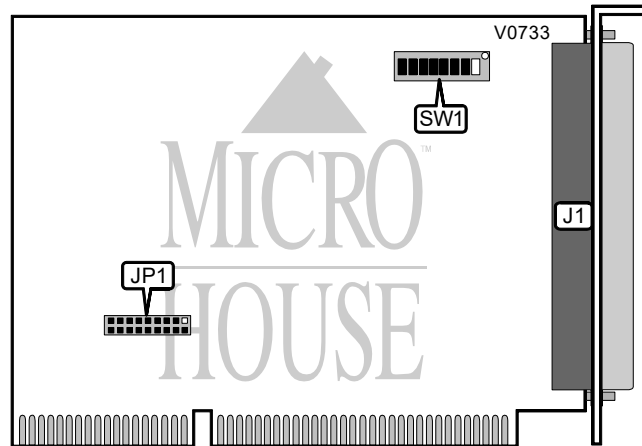

CONNECTIONS	
Purpose	Location
DB-78	J1

FACTORY CONFIGURED-DO NOT ALTER	
Switch	Setting
SW1/1	Off
SW1/8	Off

INTERRUPT SELECTION	
IRQ	JP1
2	Pins 1 & 2 closed
3	Pins 3 & 4 closed
4	Pins 5 & 6 closed
5	Pins 7 & 8 closed
7	Pins 9 & 10 closed
10	Pins 11 & 12 closed
11	Pins 13 & 14 closed
12	Pins 15 & 16 closed
15	Pins 17 & 18 closed

Continued on next page. . .

MULTI-TECH SYSTEMS, INC.
ISI608PC

...continued from previous page

ADDRESS SELECT						
Address	SW1/7	SW1/6	SW1/5	SW1/4	SW1/3	SW1/2
100h	Off	On	Off	Off	Off	Off
110h	Off	On	Off	Off	Off	On
120h	Off	On	Off	Off	On	Off
130h	Off	On	Off	Off	On	On
200h (First card)	On	Off	Off	Off	Off	Off
210h (Second card)	On	Off	Off	Off	Off	On
220h (Third card)	On	Off	Off	Off	On	Off
230h (Fourth card)	On	Off	Off	Off	On	On
3C0h	On	On	On	On	Off	Off
3D0h	On	On	On	On	Off	On
3E0h	On	On	On	On	On	Off
3F0h	On	On	On	On	On	On

Note: A total of 752 memory base address settings are available. The switches are a binary representation of the decimal addresses. Switch 2 is the Least Significant Bit and switch 7 is the Most Significant Bit. The switches have the following decimal values: switch 2=16, 3=32, 4=64, 5=128, 6=256, 7=512. Add the values of the on switches to obtain the correct memory address. (Off=0, On=1)