
Q4/93

## **ULTRASTOR CORPORATION ULTRA 24FA**

32-bit, EISA Data bus: Size: Hard drive supported:

Three/quarter-length, full-height card Up to seven SCSI drives Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

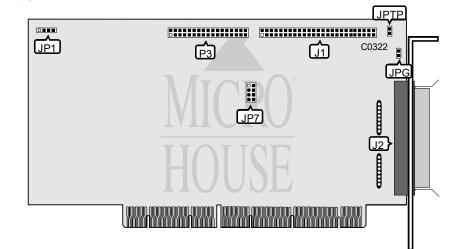

CONNECTIONS	
Function	Location
50-pin SCSI connector - internal	J1
50-pin SCSI connector - external	J2
34-pin control cable connector - floppy drive	P3
4-pin connector -Drive active LED	JP1

	USER CONFIGURABLE SETTINGS		
	Function	Location	Setting
Í	Floppy drive enabled	JP7/jumper 1	closed
	Floppy drive disabled	JP7/jumper 1	open
Í	SCSI Termination enabled	JPTP	closed
	SCSI Termination disabled	JPTP	open

MISCELLAN	IEOUS TECHNICAL NOTES
All other jumpers a	are factory configured - do not alter

Copyright © 1991, 1992, 1993 by Micro House Int'I (800) 926-8299. Research Dept. (303) 443-3389.

VOLUME 3 - Controller Cards

Copyright © 1991, 1992, 1993 by Micro House Int'I (800) 926-8299. BBS (303) 443-9957.