


MEDIA VISION TECHNOLOGY, INC.
PRO AUDIO WAVETABLE SCSI

| | |
|--------------------|--|
| Card Type | Sound card |
| Chipset Controller | Media Vision |
| I/O Options | CD-ROM audio, game/MIDI port, line in, microphone in, SCSI interface, speaker out, wavetable connector |
| Maximum DRAM | N/A |

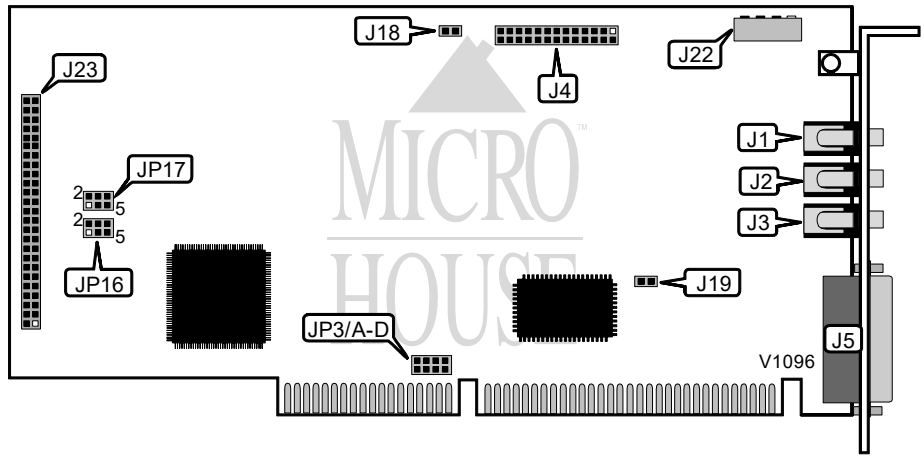

| CONNECTIONS | | | |
|---------------------|----------|-----------------------|----------|
| Purpose : | Location | Purpose : | Location |
| Line in | J1 | Game/MIDI port | J5 |
| Mic in | J2 | CD-ROM - audio in | J22 |
| Speaker out | J3 | 50-pin SCSI interface | J23 |
| Wavetable connector | J4 | | |

| BASE ADDRESS SELECTION | | |
|------------------------|-------------------|---------------------------------|
| Address | JP16 | JP17 |
| 390h | Open | Pins 1 & 3, 2 & 4, 5 & 6 closed |
| 230h | Pins 5 & 6 closed | Pins 1 & 2, 3 & 4, 5 & 6 closed |
| 290h | Pins 5 & 6 closed | Pins 1 & 3, 2 & 4, 5 & 6 closed |
| 330h | Open | Pins 1 & 2, 3 & 4, 5 & 6 closed |
| 350h | Open | Pins 1 & 2, 4 & 6, 3 & 5 closed |

Continued next page...

MEDIA VISION TECHNOLOGY, INC.
PRO AUDIO WAVETABLE SCSI

... continued from previous page.

| MPU-401 CONFIGURATION | |
|-----------------------|--------|
| Setting | J18 |
| if Disabled | Closed |
| Enabled | Open |

| GAME PORT CONFIGURATION | |
|-------------------------|--------|
| Setting | J19 |
| if Enabled | Open |
| Disabled | Closed |

| INTERRUPT SELECTION | | | | |
|---------------------|--------|--------|--------|--------|
| IRQ | JP3/A | JP3/B | JP3/C | JP3/D |
| if 15 | Closed | Open | Open | Open |
| 10 | Open | Open | Open | Closed |
| 11 | Open | Open | Closed | Open |
| 14 | Open | Closed | Open | Open |