


AST RESEARCH, INC.
RAMPAGE!

Card Type	Memory card
Chipset Controller	N/A
I/O Options	Memory
Maximum DRAM	2MB

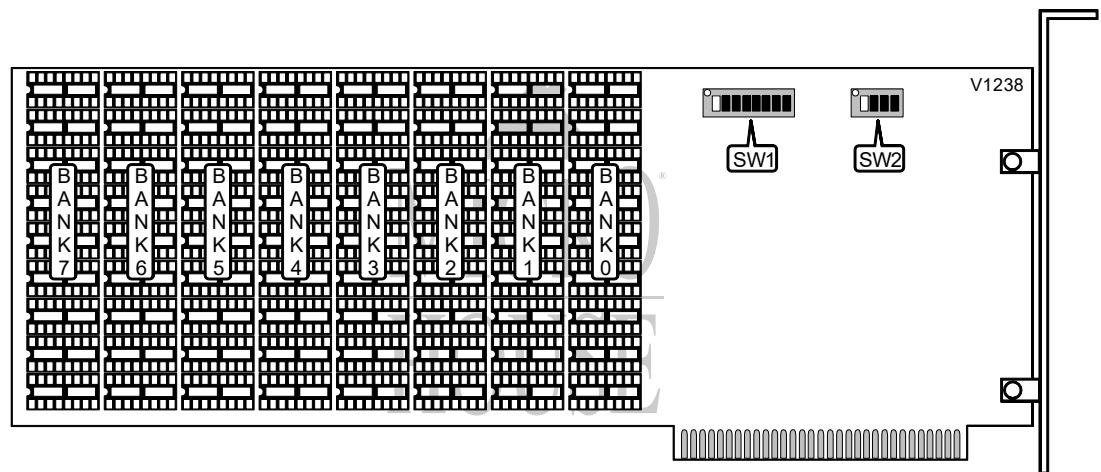

BASE I/O ADDRESS SELECTION				
Address	SW1/1	SW1/2	SW1/3	SW1/4
f 218h	On	On	On	Off
208h	On	On	On	On
258h	On	Off	On	Off
268h	On	Off	Off	On
2A8h	Off	On	Off	On
2B8h	Off	On	Off	Off
2E8h	Off	Off	Off	On

BANKS AVAILABLE AS SYSTEM MEMORY CONFIGURATION		
Bank	SW1/5	SW1/6
f 2 (512KB)	On	Off
0	On	On
1 (256KB)	Off	On
3 (768KB)	Off	Off

Continued next page...

AST RESEARCH, INC. RAMPAGE!

... continued from previous page.

DUAL PAGING MODE CONFIGURATION	
Setting	SW1/7
Enabled	On
Disabled	Off

PARITY ERROR CHECKING CONFIGURATION	
Setting	SW1/8
Enabled	On
Disabled	Off

STARTING MEMORY ADDRESS SELECTION				
Address	SW2/1	SW2/2	SW2/3	SW2/4
640KB	Off	On	Off	On
0KB	Off	Off	Off	Off
64KB	On	Off	Off	Off
128KB	Off	On	Off	Off
192KB	On	On	Off	Off
256KB	Off	Off	On	Off
320KB	On	Off	On	Off
384KB	Off	On	On	Off
448KB	On	On	On	Off
512KB	Off	Off	Off	On
576KB	On	Off	Off	On

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	None	None	None	None
512KB	None	None	None	None
768KB	None	None	None	None
1024KB	None	None	None	None
1280KB	None	None	None	(9) 256 x 1
1536KB	None	None	(9) 256 x 1	(9) 256 x 1
1792KB	None	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1
2048KB	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1

Continued next page...

AST RESEARCH, INC.
RAMPAGE!

... continued from previous page.

DRAM CONFIGURATION (CONTINUED)				
Size	Bank 4	Bank 5	Bank 6	Bank 7
256KB	None	None	None	(9) 256 x 1
512KB	None	None	(9) 256 x 1	(9) 256 x 1
768KB	None	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1
1024KB	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1
1280KB	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1
1536KB	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1
1792KB	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1
2048KB	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1	(9) 256 x 1