


BUSLOGIC INC.  
BT-440C/445C

Q4/94

Data bus: 32-bit, VL-bus strange1  
Size: Full-length, full-height card  
Hard drive supported: Up to seven SCSI devices  
Floppy drives supported: 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

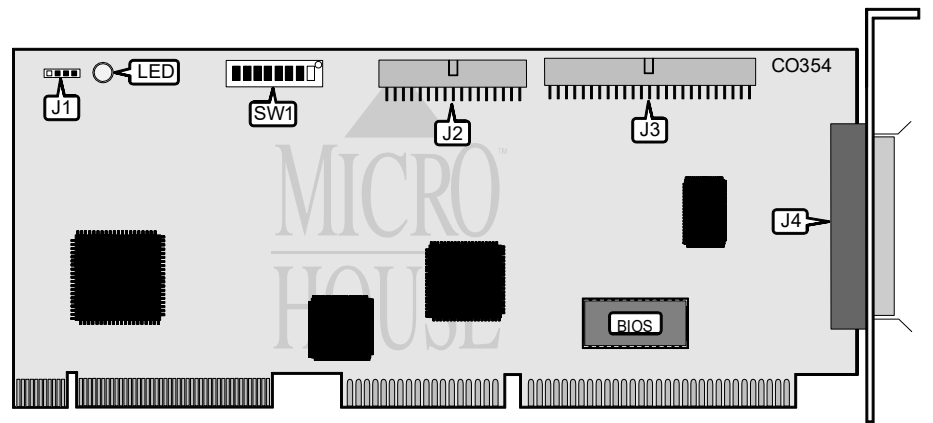

CONNECTIONS	
Function	Location
4-pin connector - Drive activity LED	J1
34-pin connector - Floppy drive interface	J2
50-pin connector - Internal SCSI interface	J3
50-pin connector - External SCSI-2 interface	J4

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Local bus clock speed set > 33MHz	SW1/4	On
Local bus clock speed set <= 33MHz	SW1/4	Off
i Floppy connector enabled	SW1/8	On
Floppy connector disabled	SW1/8	Off

Continued on next page . . .

BUSLOGIC INC.  
BT-440C/445C

. . . continued from previous page

PORT ADDRESS CONFIGURATION			
Port Address	SW1/1	SW1/2	SW1/3
í 330	On	On	On
334	Off	On	On
230	On	Off	On
234	Off	Off	On
130	On	On	Off
134	Off	On	Off
N/A	N/A	Off	Off

BIOS ADDRESS CONFIGURATION			
BIOS Address	SW1/5	SW1/6	SW1/7
í DC000	On	On	On
D8000	Off	On	On
D4000	On	Off	On
D0000	Off	Off	On
CC000	On	On	Off
C8000	Off	On	Off
Disabled	N/A	Off	Off