


PINE TECHNOLOGY
PT-611

Q1/94

Data bus: 16-bit, ISA
Size: Half-length, half-height card
Hard drive supported: Two IDE (AT) Interface drives
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

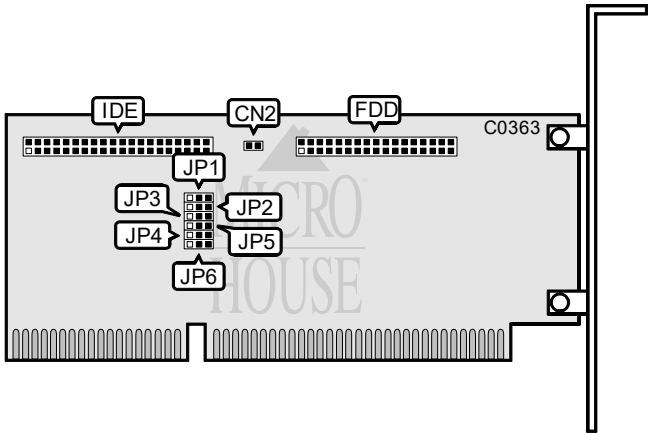

CONNECTIONS		
Function		Location
40-pin IDE(AT) Interface connector		IDE
2-pin connector - Drive active LED		CN2
34-pin control cable connector - floppy drive		FDD

USER CONFIGURABLE SETTINGS			
Function		Location	Setting
i	I/O Channel Ready signal disabled	JP1	pins 1 & 2 closed
	I/O Channel Ready signal enabled	JP1	pins 2 & 3 closed
i	Hard drive enabled	JP2	pins 1 & 2 closed
	Hard drive disabled	JP2	pins 2 & 3 closed
i	Floppy drive enabled	JP3	pins 1 & 2 closed
	Floppy drive disabled	JP3	pins 2 & 3 closed
i	Floppy drive booting sequence is A:/B:	JP4	pins 1 & 2 closed
	Floppy drive booting sequence is B:/A:	JP4	pins 2 & 3 closed
i	Floppy drive port address is 3F0-3F7h	JP5	pins 1 & 2 closed
	Floppy drive port address is 370-377h	JP5	pins 2 & 3 closed
i	Hard drive port address is 1F0-1F7h	JP6	pins 1 & 2 closed
	Hard drive port address is 170-177h	JP6	pins 2 & 3 closed