


# UNIDENTIFIED SUN-2110

Q1/94

**Data bus:** 16-bit, ISA  
**Size:** Three/quarter-length, full-height card  
**Hard drive supported:** Two IDE (AT) Interface drives  
**Floppy drives supported:** Two 360KB, 720KB, 1.2MB, or 1.44MB drives

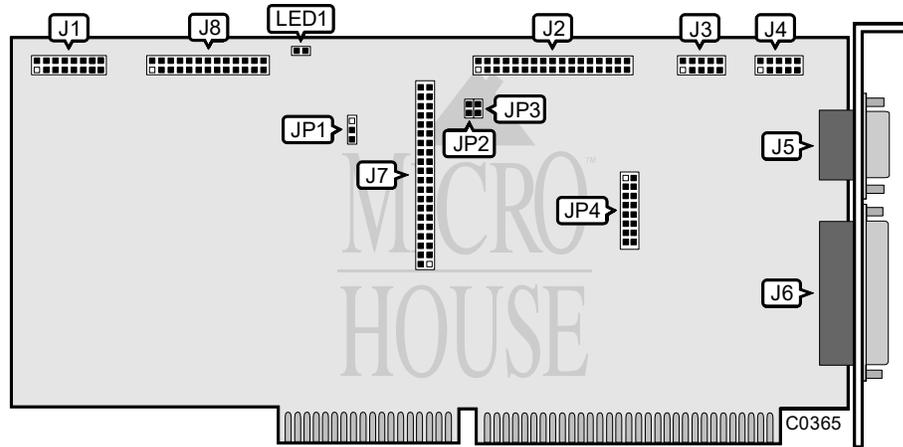

CONNECTIONS	
Function	Location
15-pin game port - internal	J1
34-pin control cable connector - floppy drive	J2
10-pin serial port (COM2/4) - internal	J3
10-pin serial port (COM1/3) - internal	J4
15-pin analog VGA port - external	J5
25-pin parallel port (LPT1/2/3) - external	J6
40-pin IDE(AT) Interface connector	J7
26-pin video feature connector	J8
2-pin connector - Drive active LED	LED1

Continued on next page . . .

**UNIDENTIFIED  
SUN-2110**

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
VGA connector enabled	JP1	pins 1 & 2 closed
VESA feature connector enabled	JP1	pins 2 & 3 closed
Monochrome video mode enabled	JP2	closed
Color video mode enabled	JP2	open
Interlaced video mode enabled	JP3	closed
Non-interlaced video mode enabled	JP3	open
í Hard drive enabled	JP4/jumper 1	closed
Hard drive disabled	JP4/jumper 1	open
í Game Port (J1) enabled	JP4/jumper 2	closed
Game Port (J1) disabled	JP4/jumper 2	open
í Floppy drive enabled	JP4/jumper 3	closed
Floppy drive disabled	JP4/jumper 3	open
í Serial Port 1 (J4) enabled	JP4/jumper 4	closed
Serial Port 1 (J4) disabled	JP4/jumper 4	open
í Serial Port 2 (J3) enabled	JP4/jumper 7	closed
Serial Port 2 (J3) disabled	JP4/jumper 7	open
í Serial Port 1 (J4) is set to COM1 Serial Port 2 (J3) is set to COM2	JP4/jumper 8	open
Serial Port 1 (J4) is set to COM3 Serial Port 2 (J3) is set to COM4	JP4/jumper 8	closed

PARALLEL PORT (J6) CONFIGURATION		
LPT	JP4/jumper 5	JP4/jumper 6
LPT1 enabled	open	closed
LPT2 enabled	closed	open
LPT3 enabled	closed	closed
Disabled	open	open