


UNIDENTIFIED SUN-5234

Q1/94

Data bus: 16-bit, ISA
Size: Half-length, full-height card
Hard drive supported: Two IDE (AT) Interface drives
 Up to seven SCSI devices
Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

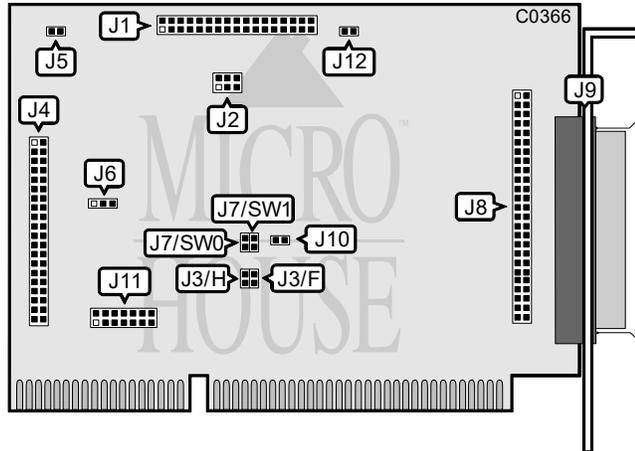

CONNECTIONS	
Function	Location
34-pin control cable connector - floppy drive	J1
40-pin IDE(AT) Interface connector	J4
2-pin connector - Drive active LED (IDE)	J5
50-pin SCSI connector - internal	J8
50-pin SCSI connector - external	J9
2-pin connector - Drive active LED (SCSI)	J12

Continued on next page . . .

**UNIDENTIFIED
SUN-5234**

. . . continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í Floppy drive enabled	J3/Jumper F	open
Floppy drive disabled	J3/Jumper F	closed
í Hard drive enabled	J3/Jumper H	open
Hard drive disabled	J3/Jumper H	closed
í Zero Wait State disabled	J10	open
Zero Wait State enabled	J10	closed

INTERRUPT REQUEST - J11							
IRQ	Jumper 1	Jumper 2	Jumper 3	Jumper 4	Jumper 5	Jumper 6	Jumper 7
3	closed	open	open	open	open	open	open
5	open	closed	open	open	open	open	open
10	open	open	closed	open	open	open	open
11	open	open	open	closed	open	open	open
12	open	open	open	open	closed	open	open
14	open	open	open	open	open	closed	open
15	open	open	open	open	open	open	closed

BIOS ADDRESS - J7		
Address	Jumper SW0	Jumper SW1
í CA00	open	open
C800	closed	closed
CE00	open	closed
DE00	closed	closed

MISCELLANEOUS TECHNICAL NOTES
The functions of jumpers J2 and J6 are not documented.