


ARNET CORPORATION

SYNCOM/386, SYNCOM/386I

Card Type	Serial
Processor	80386SX
Processor Speed	25MHz
Chip Set	Zilog/AMD
Maximum Onboard Memory	5MB RAM
I/O Options	Serial ports (4)
Data Bus	16-bit ISA

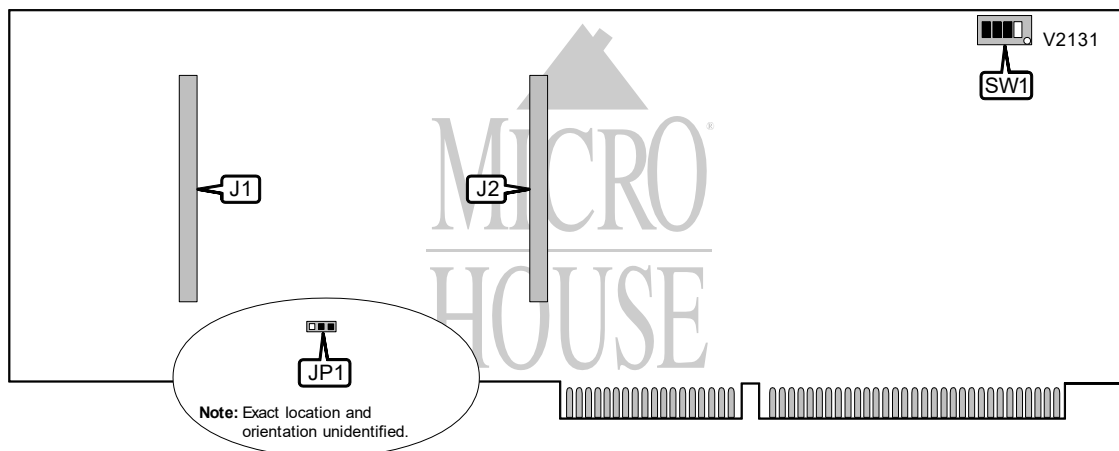

CONNECTIONS			
Function	Label	Function	Label
Four-port daughterboard header	J1	Two-port daughterboard header	J2

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Fast Select enabled	JP1	Pins 2 & 3 closed
Fast Select disabled	JP1	Pins 1 & 2 closed


BASE I/O ADDRESS				
Setting	SW1/1	SW1/2	SW1/3	SW1/4
03Ch	On	On	On	On
07Ch	On	On	On	Off
0BCh	On	On	Off	On
0FCh	On	On	Off	Off
13Ch	On	Off	On	On
17Ch	On	Off	On	Off
1BCh	On	Off	Off	On
1FCh	On	Off	Off	Off
23Ch	Off	On	On	On
27Ch	Off	On	On	Off
2BCh	Off	On	Off	On
2FCh	Off	On	Off	Off
33Ch	Off	Off	On	On
37Ch	Off	Off	On	Off
3BCh	Off	Off	Off	On
3FCh	Off	Off	Off	Off

Continued on next page. . .

ARNET CORPORATION

SYNCOM/386, SYNCOM/386I (2-PORT V.35/V.24 DAUGHTERBOARD)

. . . continued from previous page

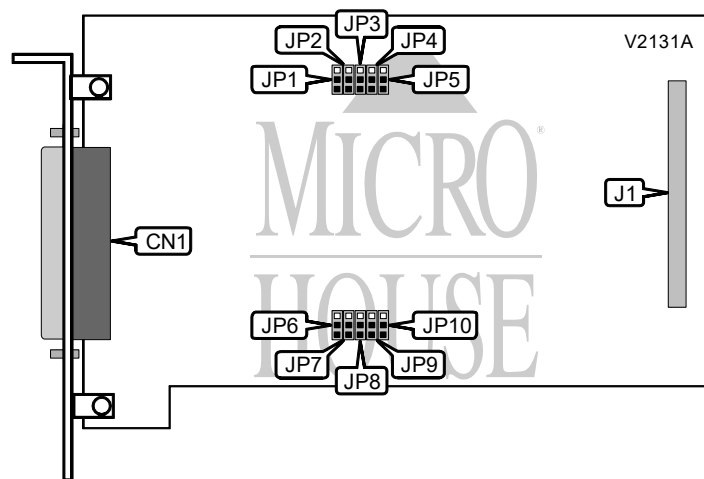

CONNECTIONS			
Function	Label	Function	Label
V.35 or V.24 serial ports via DB-37	CN1	Daughterboard header	J1
Note: Serial ports are provided via included adapter cable.			

PORT 1 TYPE					
Setting	JP1	JP2	JP3	JP4	JP5
V.35	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
V.24	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
Note: Pins designated are in the closed position.					


PORT 2 TYPE					
Setting	JP6	JP7	JP8	JP9	JP10
V.35	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
V.24	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
Note: Pins designated are in the closed position.					

Continued on next page. . .

ARNET CORPORATION

SYNCOM/386, SYNCOM/386I (4-PORT V.35/V.24 DAUGHTERBOARD)

... continued from previous page

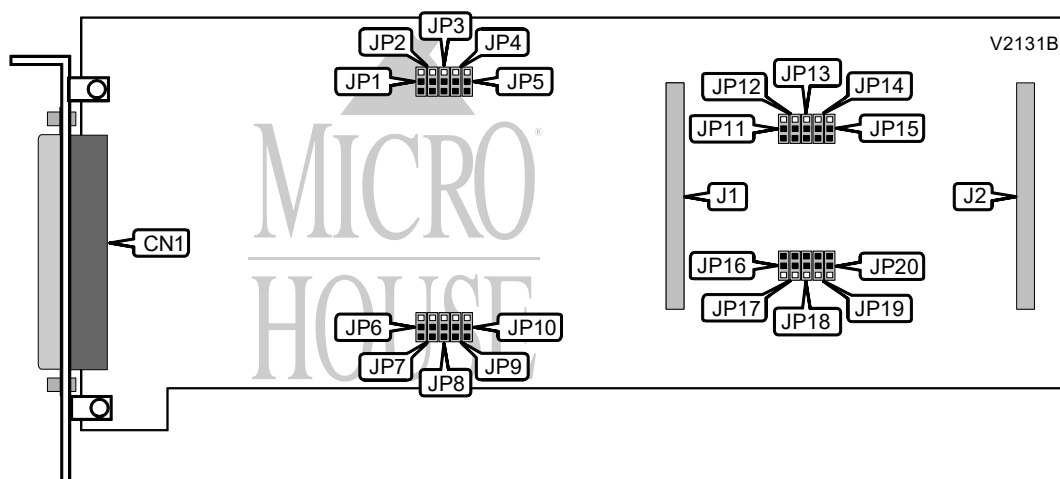

CONNECTIONS			
Function	Label	Function	Label
V.35 or V.24 serial ports via DB-62	CN1	Daughterboard header	J2
Daughterboard header	J1		

Note: Serial ports are provided via included adapter cable.

PORT 1 TYPE					
Setting	JP1	JP2	JP3	JP4	JP5
V.35	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
V.24	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated are in the closed position.

PORT 2 TYPE					
Setting	JP6	JP7	JP8	JP9	JP10
V.35	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
V.24	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated are in the closed position.

PORT 3 TYPE					
Setting	JP11	JP12	JP13	JP14	JP15
V.35	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
V.24	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3

Note: Pins designated are in the closed position.

PORT 4 TYPE					
Setting	JP16	JP17	JP18	JP19	JP20
V.35	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2
V.24	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3


Note: Pins designated are in the closed position.

Continued on next page. . .

ARNET CORPORATION

SYNCOM/386, SYNCOM/386I (X.21 DAUGHTERBOARDS)

... continued from previous page

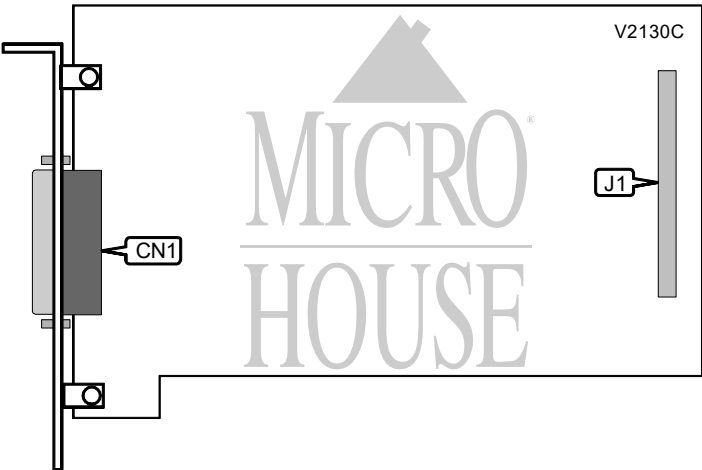

TWO-PORT BOARD



FOUR-PORT BOARD

CONNECTIONS			
Function	Label	Function	Label
X.21 serial ports via DB-44	CN1	Daughterboard header	J1
Note: Serial ports are provided via included adapter cable.			