


QUATECH, INC.

WSB-100-10, WSB-100-20

Card Type
I/O Options

Signal generator
Analog/digital output port, Analog/digital I/O ports (2), multi-board
connectors (2), output modules (2)
Data Bus
16-bit ISA

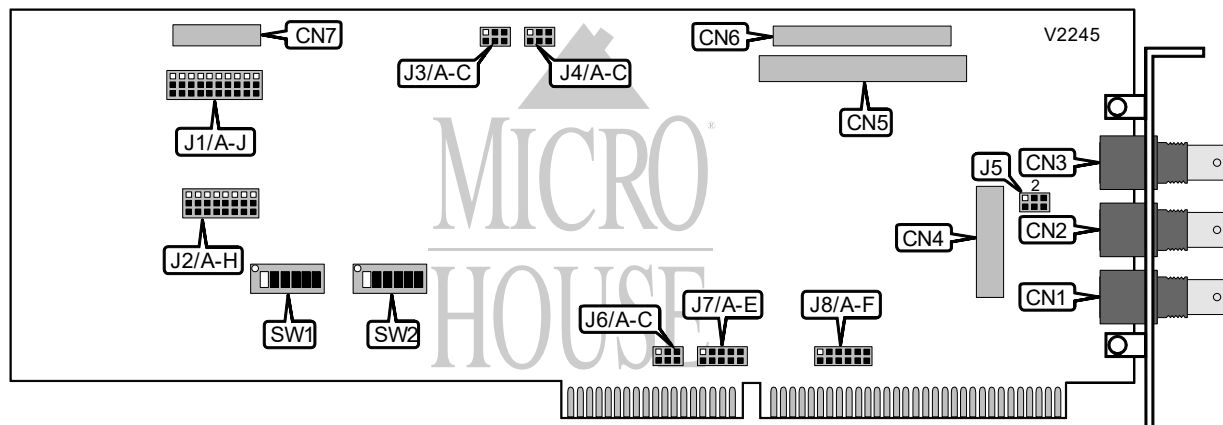

CONNECTIONS			
Function	Label	Function	Label
Analog/digital output port	CN1	Output module header	CN5
Analog/digital I/O port 1	CN2	Multi-board connector	CN6
Analog/digital I/O port 2	CN3	Multi-board connector	CN7
Output module header	CN4		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	J1/A	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/B	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/C	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/D	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/E	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/F	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/G	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/H	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/I	Pins 1 & 2 closed	
í Factory configured - do not alter	J1/J	Pins 1 & 2 closed	
í Factory configured - do not alter	J2/A	Pins 1 & 2 closed	
í Factory configured - do not alter	J2/B	Pins 1 & 2 closed	
í Factory configured - do not alter	J2/C	Pins 1 & 2 closed	
í Factory configured - do not alter	J2/D	Pins 1 & 2 closed	
í Factory configured - do not alter	J2/E	Pins 1 & 2 closed	
í Card is not configured for trigger delay	J2/F	Pins 1 & 2 closed	
Card is configured for trigger delay	J2/F	Pins 2 & 3 closed	
í Factory configured - do not alter	J2/G	Pins 1 & 2 closed	
í Factory configured - do not alter	J2/H	Pins 1 & 2 closed	

Continued on next page. . .

QUATECH, INC.
WSB-100-10, WSB-100-20

... continued from previous page

BASE I/O ADDRESS						
Setting	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
0000h	On	On	On	On	On	On
0010h	On	On	On	On	On	On
0020h	On	On	On	On	On	On
0030h	On	On	On	On	On	On
0040h	On	On	On	On	On	On
0210h	On	On	On	On	On	On
0280h	On	On	On	On	On	On
0300h	On	On	On	On	On	On
FFB0h	Off	Off	Off	Off	Off	Off
FFC0h	Off	Off	Off	Off	Off	Off
FFD0h	Off	Off	Off	Off	Off	Off
FFE0h	Off	Off	Off	Off	Off	Off
FFF0h	Off	Off	Off	Off	Off	Off

BASE I/O ADDRESS (CON'T)						
Setting	SW2/1	SW2/2	SW2/3	SW2/4	SW2/5	SW2/6
0000h	On	On	On	On	On	On
0010h	On	On	On	On	On	Off
0020h	On	On	On	On	Off	On
0030h	On	On	On	On	Off	Off
0040h	On	On	On	Off	On	On
0210h	Off	On	On	On	On	Off
0280h	Off	On	Off	On	On	On
0300h	Off	Off	On	On	On	On
FFB0h	Off	Off	Off	On	Off	Off
FFC0h	Off	Off	Off	Off	On	On
FFD0h	Off	Off	Off	Off	On	Off
FFE0h	Off	Off	Off	Off	Off	On
FFF0h	Off	Off	Off	Off	Off	Off

Note: A total of 4095 base address settings are available. The switches are a binary representation of the decimal memory addresses. SW1/1 is the Most Significant Bit and switch SW2/6 is the Least Significant Bit. The switches have the following decimal values: SW1/1=32768, SW1/2=16384, SW1/3=8192, SW1/4=4096, SW1/5=2048, SW1/6=1024, SW2/1=512, SW2/2=256, SW2/3=128, SW2/4=64, SW2/5=32, SW2/6=16. Turn off the switches and add the values of the switches that are off to obtain the correct memory address. (Off=1, On=0)

Continued on next page. . .

QUATECH, INC.
WSB-100-10, WSB-100-20

... continued from previous page

ANALOG/DIGITAL I/O PORT 1 FUNCTION				
Setting	J3/A	J3/B	J3/C	J5
External clock input	Closed	Open	Open	Pins 5 & 6 closed
Trigger clock input	Open	Closed	Open	Pins 5 & 6 closed
Trigger delay input	Open	Open	Closed	Pins 5 & 6 closed
Data strobe output	Open	Open	Open	Pins 4 & 5 closed

ANALOG/DIGITAL I/O PORT 2 FUNCTION				
Setting	J4/A	J4/B	J4/C	J5
External clock input	Closed	Open	Open	Pins 2 & 3 closed
Trigger clock input	Open	Closed	Open	Pins 2 & 3 closed
Trigger delay input	Open	Open	Closed	Pins 2 & 3 closed
Data strobe output	Open	Open	Open	Pins 1 & 2 closed

DMA CHANNEL			
Setting	J6/A	J6/b	J6/C
DMA5	Open	Open	Closed
DMA6	Open	Closed	Open
DMA7	Closed	Open	Open

INTERRUPT					
Setting	J7/A	J7/B	J7/C	J7/D	J7/E
IRQ2/9	Open	Open	Open	Open	Open
IRQ3	Open	Open	Open	Open	Open
IRQ4	Open	Open	Open	Open	Open
IRQ5	Open	Open	Open	Open	Open
IRQ6	Open	Open	Open	Open	Open
IRQ7	Open	Open	Open	Open	Open
IRQ10	Open	Open	Open	Open	Closed
IRQ11	Open	Open	Open	Closed	Open
IRQ12	Open	Open	Closed	Open	Open
IRQ14	Open	Closed	Open	Open	Open
IRQ15	Closed	Open	Open	Open	Open

INTERRUPT (CON'T)						
Setting	J8/A	J8/B	J8/C	J8/D	J8/E	J8/F
IRQ2/9	Open	Open	Open	Open	Open	Closed
IRQ3	Closed	Open	Open	Open	Open	Open
IRQ4	Open	Closed	Open	Open	Open	Open
IRQ5	Open	Open	Closed	Open	Open	Open
IRQ6	Open	Open	Open	Closed	Open	Open
IRQ7	Open	Open	Open	Open	Closed	Open
IRQ10	Open	Open	Open	Open	Open	Open
IRQ11	Open	Open	Open	Open	Open	Open
IRQ12	Open	Open	Open	Open	Open	Open
IRQ14	Open	Open	Open	Open	Open	Open
IRQ15	Open	Open	Open	Open	Open	Open