


CARDINAL TECHNOLOGIES, INC

9600BPS V.32 V.42BIS FAX (1/2CARD-VER.2)

Card Type	Modem (synchronous/asynchronous)
Chip Set	Unidentified
Maximum Data Rate	9600bps
Maximum Fax Rate	Unidentified
Data Bus	8-bit ISA
Fax Class	Class I & II
Data Modulation Protocol	Bell 103/212A
Fax Modulation Protocol	ITU-T V.21, V.22, V.22bis, V.32
Error Correction/Compression	Unidentified
	MNP5, V.42, V.42bis

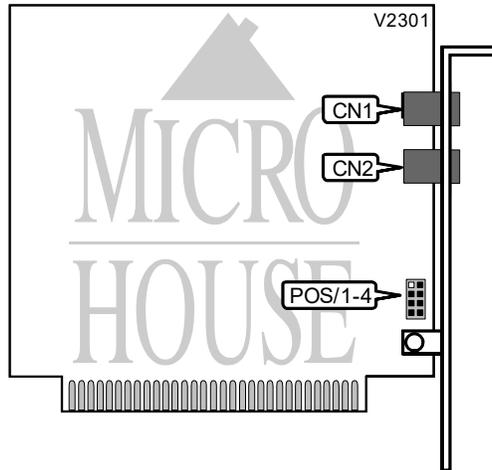

CONNECTIONS				
Function	Label	Function	Label	
Line out/in	CN1	Line in/out	CN2	

SERIAL PORT ADDRESS			
Setting	POS/1	POS/2	
COM1 (3F8h)	Off	Off	
COM2 (2F8h)	Off	On	
COM3 (3E8h)	On	Off	
COM4 (2E8h)	On	On	

INTERRUPT SELECTION			
Setting	POS/3	POS/4	
2	On	On	
3	Off	On	
4	Off	Off	
5	On	Off	

Continued on next page . . .

CARDINAL TECHNOLOGIES, INC
9600BPS V.32 V.42BIS FAX (1/2CARD-VER.2)

. . . continued from previous page

SUPPORTED COMMAND SET	
Basic AT Commands	
AT, 'Comma', A/	
A, B, C, E, F, H, L, M, N, O, P, Q, S, T, V, W, X, Y, Z	
&C, &D, &F, &G, &K, &L, &M, &P, &Q, &R, &S, &T, &U, &V, &W, &Y, &Z	
Extended AT Commands	
\A, \B, \C, \G, \J, \O, \U, \V, \X, \Y, \Z	
%A, %E, %G	
S Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S25	
S26, S27, S30, S37, S95, S108, S109, S110	
Special Commands	
"H, "O, -C, -J, -V	
Note: Please see MHI Help file for full command documentation.	

Proprietary AT Command Set

For a full command summary, see. CARDINAL TECHNOLOGIES, INC 9600BPS V.32 V.42BIS FAX (1/2CARD-VER.1)