


ELITEGROUP COMPUTER SYSTEMS, INC. CI-92 SUPER I/O CARD

Q1/94

Data bus: 16-bit, ISA
 Size: Half-length, half-height card
 Hard drives supported: Two IDE (AT) Interface drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, or 1.44MB drives

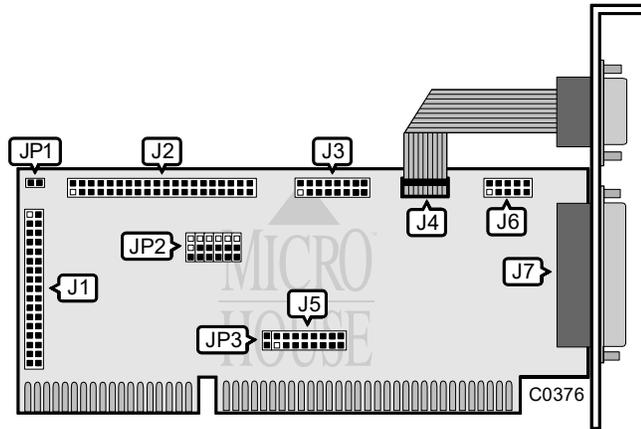

CONNECTIONS	
Function	Location
34-pin control cable connector - floppy drive	J1
40-pin IDE(AT) Interface connector	J2
15-pin game port - internal	J3
10-pin serial port (COM1/3/4) - external	J4
10-pin serial port (COM2/3/4) - internal	J6
25-pin parallel port (LPT1/2/3) - external	J7
2-pin connector - Drive active LED	JP1

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
Parallel port is uni-directional	JP3	closed
Parallel port is bi-directional	JP3	open

Continued on next page . . .

ELITEGROUP COMPUTER SYSTEMS, INC.
CI-92 SUPER I/O CARD

. . . continued from previous page

SERIAL PORT 1 (J4) INTERRUPT REQUEST - J5			
IRQ	Jumper 1	Jumper 2	Jumper 3
IRQ3	open	closed	open
í IRQ4	closed	open	open
IRQ5	open	open	closed

SERIAL PORT 2 (J6) INTERRUPT REQUEST - J5			
IRQ	Jumper 4	Jumper 5	Jumper 6
í IRQ3	closed	open	open
IRQ4	open	closed	open
IRQ5	open	open	closed

PARALLEL PORT (J7) INTERRUPT REQUEST - J5		
IRQ	Jumper 7	Jumper 8
í IRQ7	closed	open
IRQ5	open	closed

SERIAL PORT 1 (J4) CONFIGURATION - JP2		
COM	Jumper 1	Jumper 2
í COM1 (3F8h)	pins 2 & 3 closed	pins 1 & 2 closed
COM3 (3E8h)	pins 1 & 2 closed	pins 2 & 3 closed
COM4 (2E8h)	pins 2 & 3 closed	pins 2 & 3 closed
Disabled	pins 1 & 2 closed	pins 1 & 2 closed

SERIAL PORT 2 (J6) CONFIGURATION - JP2		
COM	Jumper 3	Jumper 4
í COM2 (2F8h)	pins 2 & 3 closed	pins 1 & 2 closed
COM3 (3E8h)	pins 2 & 3 closed	pins 2 & 3 closed
COM4 (2E8h)	pins 1 & 2 closed	pins 2 & 3 closed
Disabled	pins 1 & 2 closed	pins 1 & 2 closed

PARALLEL PORT (J7) CONFIGURATION - JP2		
LPT	Jumper 5	Jumper 6
LPT1 (378h)	pins 2 & 3 closed	pins 1 & 2 closed
í LPT2 (278h)	pins 1 & 2 closed	pins 2 & 3 closed
LPT3 (3BCh)	pins 2 & 3 closed	pins 2 & 3 closed
Disabled	pins 1 & 2 closed	pins 1 & 2 closed