


ABC COMPUTER COMPANY, LTD.  
16 BIT MULTI-I/O

Q1/94

Data bus: 16-bit, ISA  
Size: Half-length, full-height card  
Hard drive supported: Two IDE (AT) Interface drives  
Floppy drives supported: Four 360KB, 720KB, 1.2MB, or 1.44MB drives

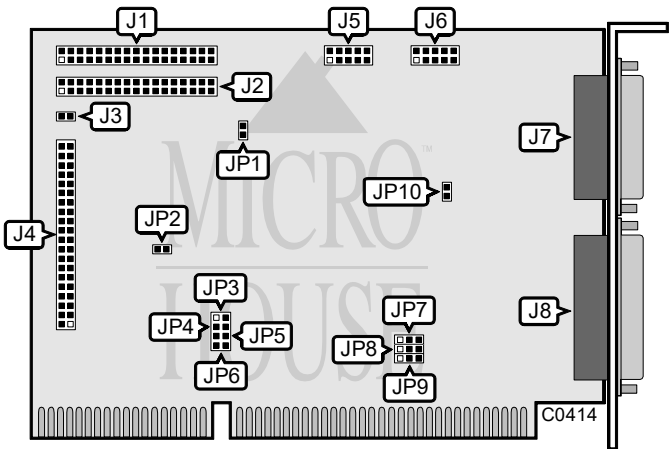

CONNECTIONS	
Function	Location
34-pin control cable connector - floppy drive	J1
34-pin control cable connector - floppy drive/tape drive	J2
2-pin connector - Drive active LED	J3
40-pin IDE(AT) Interface connector	J4
10-pin serial port (COM1/3) - internal	J5
10-pin serial port (COM2/4) - internal	J6
15-pin game port - external	J7
25-pin parallel port (LPT1/2) - external	J8

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
i Disk change signal is set to normal operation	JP1	closed
Disk change signal is set to diagnostic mode	JP1	open
i I/O Channel Ready signal disabled	JP2	closed
I/O Channel Ready signal enabled	JP2	open
i Game Port (J7) enabled	JP10	closed
Game Port (J7) disabled	JP10	open

Continued on next page . . .

# ABC COMPUTER COMPANY, LTD.

## 16 BIT MULTI-I/O

... continued from previous page

PARALLEL PORT (J8) CONFIGURATION			
LPT/IRQ	JP3	JP6	JP9
í LPT1/IRQ7	on	off	pins 2 & 3 closed
LPT2/IRQ5	off	on	pins 1 & 2 closed
Disabled	off	off	n/a

SERIAL PORT 2 (J6) CONFIGURATION		
COM/IRQ	JP4	JP7
í COM2/IRQ3	closed	pins 1 & 2 closed
COM4/IRQ5	open	pins 2 & 3 closed

SERIAL PORT 1 (J5) CONFIGURATION		
COM/IRQ	JP5	JP8
í COM1/IRQ4	closed	pins 1 & 2 closed
COM3/IRQ9	open	pins 2 & 3 closed